

# STRONG PRODUCTS FOR PERFECT SURFACES

THE PRODUCT OVERVIEW FROM JORDAN LACKE 2021



JORDAN Lacke is a brand of PLANTAG Coatings GmbH. Based on the strong alliance of this group, we have a very good network of subsidiaries and distributors. We ensure short ways to our customers and in-depth knowledge.

We always find practicable solutions for our customers. Our laboratories develop market-orientated and sustainable products using sophisticated raw materials. Innovative developments such as JORDAN CARELINE and PARQUETLINE as well as versatile effect finishes point the way to the future of finishes. We are pleased to help our customers to identify trends and to quickly implement them.

Based on this, we have been developing high-quality products for over 125 years. In all those years, we have established a firm place for ourselves with joineries and are proud of a variety of satisfied and long-standing PCG partners.

Discover on the following pages the products that have been inspiring our customers and partners for more than 125 years. Show what you are able to do with the JORDAN Lacke product world.

# **DISCOVER JORDAN LACKE**AND THE VARIETY OF OUR PRODUCT WORLD





# **NATURELINE**

JORDAN Lacke becomes green with NATURELINE. This wood preservative for indoor and outdoor use does not only protect your wooden surfaces but also the environment: Effective against animal and vegetable pests.

6 - 7



# **AQUALINE**

With AQUALINE, JORDAN Lacke is taking a step into the future. Rely on a water-based lacquer system: environmentally friendly, future-orientated and odourless.

8 - 11

# **DECOLINE**

Good products can still be improved: DECOLINE. High-solid, economical and more environmentally friendly. The decopaint-conform lacquer system convinces by many practical benefits. 12 - 15

# **CLASSICLINE**

The proven lacquer systems from JORDAN Lacke are presented: Reliable, fast drying and price conscious. CLASSICLINE, because experience delivers the best results.

16 - 26

# **STAINLINE**

With STAINLINE we add a splash of colour. Our versatile stain systems offer nearly unlimited possibilities - not only regarding colour design!

27 - 29



# **PARQUETLINE**

With PARQUETLINE, JORDAN Lacke offer products for professional parquet floors. Protection and lasting value with coatings for highest demands.

30 - 32

# **CARELINE**

The CARELINE products from JORDAN Lacke do not only maintain the surfaces but they also ensure lasting value. Your care product for parquet floors and for furniture surfaces.

33 - 35

# COMPETENCE IN LACQUER LOCALLY PRESENT

JORDAN LACKE - YOUR EXPERT IN TERMS OF COATINGS

COMPETENCE IN LACQUER FOR ROBUST SURFACES AND HIGHEST RESISTANCE.

THE PERFECT PROTECTION

COMPETENCE IN LACQUER FOR FINE AND HIGH-QUALITY SURFACES THE PERFECT FINISH

COMPETENCE IN LACQUER FOR A VARIETY OF DESIGN POSSIBILITIES.
THE PERFECT DESIGN

COMPETENCE IN LACQUER
FOR FUNCTIONAL SURFACES.
THE PERFECT FUNCTION

Because it is important what you put on top: The PCG helmet is the sign of highest quality regarding surfaces. Protection, finish, design, and function our helmet serves as a symbol for all these features.

In our company you will always find your direct contact person, be it inhouse or among our field staff. We offer commercial and technical customer service. Our international experts support you worldwide.

Discover our customer service at **jordanlacke.de** and quickly find assistance in your vicinity.

#### FOR YOU OUR FIELD STAFF IS:

- + always quickly available locally
- working for you at all times
- + competent and friendly
- + up-to-date with professional skills





# A STRONG GROUP WORLDWIDE CONCENTRATED COMPETENCE FOR A VERSATILE PRODUCT PORTFOLIO

#### **OUR INTERNATIONAL SUBSIDIARIES:**

- PLANTAG DO BRASIL LTDA.
- **PLANTAG** COATINGS GROEP B.V.
- **PLANTAG** COATINGS INDIA PVT. LTD.
- PLANTAG POLSKA SP. Z.O.O.
- PLANTAG ENDÜSTRIYEL BOYA VERNIK SANAYI TIC. LTD. STI
- **PLANTAG** ROMANIA S.R.L.
- PLANTAG SCHWEIZ GMBH

#### **OUR ADVANTAGES AT A GLANCE:**

- Modern coating systems
- + Good price-performance ratio
- Certified quality
- + Consulting and technical support locally
- + Development in cooperation with the customer
- + System supplier with own laboratories
- + Fast deliveries worldwide

JORDAN NATURE-PUR 200 JORDAN NATURE-COLOR 203 JORDAN NATURE-PUR PLUS PRO 202

7





The Sentinel Haus Institute is the knowledge and market leader for safe and healthier construction. At www.sentinel-portal.de you will find information on emission-tested products, trained specialists, certified practical examples and theme worlds around healthier building and renovation. This is the largest online marketplace for healthier building, renovation, living, learning and working. JORDAN Lacke is listed on the portal with its NATURELINE product line.



# PROTECTS WOOD AND THE ENVIRONMENT

PURELY MINERAL, WATER-BASED AND WITHOUT TOXICOLOGICAL INGREDIENTS



# **JORDAN NATURE-PUR 200**

Biocide-free wood preservative for inside and outside use.

DELIVERY BATCHES 1, 5 and 25 KG

#### **PRODUCT PROPERTIES**

- does not leave behind any harmful substances in nature 1
- ■ without pesticides, insecticides and biocides¹
- vegan
- harmless for bees<sup>1</sup> and bats<sup>2</sup>
- insects that come into contact with the treated wood after drying will not be impaired 1
- protects against harmful environmental impacts including weathering
- is in limits elastic regarding torsion and thermal expansion of the material<sup>3</sup>
- cannot be washed out
- eliminates the breeding ground of wood-destroying fungi and mould (acc. EN 113)<sup>4</sup>
- protects against animal wood pests such as termites, xylophaga, lyctidae, furniture beetles, woodworm, etc.5
- prevents the spread of wood pests after infestation<sup>5</sup>
- act as a flame-retardant, the spread of fire and the development of smoke are permanently inhibited<sup>6</sup>
- impregnated wood can promptly come into contact with the soil
- EN 71, part 3, free of extractable heavy metals

#### LISTED AT:

- **■** Sentinel Haus Institute the institute for safe and healthier construction
- European Society for Healthy Building and Indoor Hygiene (EGGBI)



#### **JORDAN NATURE-COLOR 203**

#### ADDITIONAL PRODUCT PROPERTIES

- 🛨 can also be used in colour design
- the shades of our colour card can be mixed with each other
- EN 71, part 3, free of extractable heavy metals

Biocide-free coloured wood preservative for inside and outside use.

DELIVERY BATCHES 1, 5 and 25 kg

# JORDAN NATURE-PUR PLUS PRO 202

# Commence of the commence of th

#### DELIVERY BATCHES 1, 5 and 25 kg



Also available as a starter set.

### ADDITIONAL PRODUCT PROPERTIES

- 🗈 can be used to dye or lessen the colours of the colour card
- EN 71, part 3, free of extractable heavy metals

#### TESTED BY:

- 1 ECO Institute (certification no. ID 0315-33357-002)
- 2 Swiss Coordination Office for Bat Protection
- 3 EPH, Development and Test Laboratory for Wood Technology GmbH (Nr. 2715644)
- 4 Specialist field for forest products, wood science department of the Swedish University for Agriculture (Nr. 2011-113/84)
- 5 Forest Products Department, Mississippi State University
- 6 SP Technical Research Institute of Sweden

1K AQUA-FILLER AF 430 1K+2K AQUA MAGIC-COLOR AMC 462 1K+2K AQUA-CLEAR AC 475

1K+2K AQUA-CLEAR LOW AC 477 1K+2K AQUASTEP AS 490 2K AQUA-NATUREFFEKT AN 420 1K AQUA SUN-PROTECT SP 480 AQUA-CLEAN AC 460 9

10-11

With AQUALINE JORDAN Lacke take a step into the future. You too should put the focus on a water-based lacquer system: environmentally sound and healthy, future-orientated and odourless.

# FRESH AND FREE

AQUALINE - THE WATER-BASED LACQUER SYSTEM FROM JORDAN LACKE



#### **1K AQUA-FILLER AF 430**

# Water-based 1-component universal filler with excellent filling power and good sanding.

1K AQUA-FILLER AF 430 (white)
1K AQUA-FILLER AF 430-S (black)

DELIVERY BATCHES 7 and 25 kg

#### PRODUCT PROPERTIES

- overcoatable with all our colour lacquer systems from JORDAN Lacke
- excellently sandable
- excellent filling power
- perfect adhesion

#### **TEST STANDARDS**

- EN 71, part 3, free of extractable heavy metals
- DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR AMC 462) (in examination)
- decopaint-konform



Water-based 1+2 component coloured lacquer

#### **1K+2K AQUA MAGIC-COLOR AMC 462**

#### PRODUCT PROPERTIES

- very high light stability
- very high opacity
- very good sanding marks coverage
- igh abrasion and scratch resistance
- excellent levelling properties
- easy to use

#### **TEST STANDARDS**

- EN 71, part 3, free of extractable heavy metals
- DIN 4102-B1 low flammability (in examination)
- DIN 53160 resistance to saliva and perspiration (in examination)
- **■** EN ISO 2409-GT O adhesive strength
- decopaint-conform

GLOSS LEVEL

#### MIXING RATIO

matt

10:1 with AQUAHARDENER 412 depending on volume

harmonizing quality demand and

environmental awareness.

#### **DELIVERY BATCHES**

3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc

# We'll Aqua Clear AC 405-00 AOUNT INE

Water-based 1+2 component clear lacquer

with high scratch and abrasion resistance.

#### 1K+2K AQUA-CLEAR AC 475

## PRODUCT PROPERTIES

- very high light stability
- excellent transparency
- 🛨 high abrasion and scratch resistance
- very good accentuation of the grain
- easy to use

#### GLOSS LEVEL

- -10 (deep matt)
- -20 (matt)
- -30 (semi-matt)

#### MIXING RATIO 10:1 with AQUAHARDENER 412 depending on volume

DELIVERY BATCHES 10 kg and 25 kg

- EN 71, part 3, free of extractable heavy metals
- DIN 4102-B1 low flammability (in examination)
- DIN 53160 resistance to saliva and perspiration (in examination)
- EN ISO 2409-GT O adhesive strength
- decopaint-conform



#### **1K+2K AQUA-CLEAR LOW AC 477**



Water-based 1+2 component clear lacquer

**DELIVERY BATCHES GLOSS LEVEL** -10 (deep matt)

for coating off porous surfaces.

10 and 25 kg

-20 (matt)

-30 (semi-matt)

MIXING RATIO 10:1 with AQUAHARDENER 412 depending on volume

PRODUCT PROPERTIES

■ solid-state-reduced variant

especially suitable for porous woods

■ very high light stability

particularly high transparency

+ very good accentuation of the grain

easy to use

TEST STANDARDS

EN 71, part 3, free of extractable heavy metals

**■** DIN 4102-B1 low flammability (in examination)

■ DIN 53160 resistance to saliva and perspiration (in examination)

EN ISO 2409-GT O adhesive strength

decopaint-conform



#### 1K+2K AQUASTEP AS 490

PRODUCT PROPERTIES

excellent light resistance and good grain warmth effect

easy handling

standing and suspended parts can be coated without problems

even levelling and high abrasion resistance

**TEST STANDARDS** 

EN 71, part 3, free of extractable heavy metals

following DIN 68861-1, 1B chemical resistance

EN ISO 2409-GT O adhesive strength

resistance to cream

decopaint-conform

Transparent, water-based stair lacquer can be used as 1-component or 2-component lacquer.

**GLOSS LEVEL** 

matt and

semi-matt

MIXING RATIO 10:1 with AQUAHARDENER 410 depending on volume

**DELIVERY BATCHES** 10 and 25 kg

## **2K AQUA-NATUREFFEKT AN 420**

PRODUCT PROPERTIES high resistance

🔢 very good chemical and mechanical resistance

dries to a raw wood-like dull matt finish

the obtained surfaces are smooth to the touch and resistant

**TEST STANDARDS** 

following DIN 68861-1, 1B chemical resistance

■ DIN 53160 resistance to saliva and perspiration (in examination)

EN 71, part 3, free of extractable heavy metals

EN ISO 2409-GT O adhesive strength

Water-based 2K natural effect lacquer with raw wood effect and high resistance.

**GLOSS LEVEL** natural matt

MIXING RATIO 10:1 with AQUAHARDENER 410 depending on volume

**DELIVERY BATCHES** 5 and 25 kg



# **1K AQUA SUN-PROTECT SP 480**



Serves as a very good UV protection and protects the wood against the natural yellowing process.

GLOSS LEVEL natural matt

DELIVERY BATCHES 5, 10 and 25 kg

#### PRODUCT PROPERTIES

- excellent light resistance
- wery pleasant haptics
- easy processingfast drying
- good block resistance

#### TEST STANDARDS

■ Formaldehyde-free



Cleaning concentrate with good cleaning effect


# **AQUA-CLEAN AC 460**

### PRODUCT PROPERTIES

- Cleaning concentrate for cleaning application devices and lines
- for cleaning pigmented water-based lacquers
- 🛨 efficient machine cleaning after water-based coating
- very economical

for machines, systems and spray guns.

DELIVERY BATCHES 5 and 25 litre



13

1K DECO-OBJECT-OIL DO 670

1K DECO-NATURWACHS-OIL DO 680

1K+2K DECO-OIL DO 660

1K+2K DECO-OIL-COLOR DO 662

14-15



# **BEAUTY WITH LIGHTNESS**DECOLINE - THE DECOPAINT-CONFORM LACQUER SYSTEM FROM JORDAN LACKE





Decopaint-conform 2-component sealing primer to solidify the substrate.

MIXING RATIO 2:1 with DECOHARDENER 610 depending on volume

DELIVERY BATCHES 5 litre

# **2K DECOBASE DB 626**

#### PRODUCT PROPERTIES

- sealing effect
- stabilization of loose substrate particles
- excellent sandability

#### **TEST STANDARDS**

decopaint-conform



Solvent-based decopaint-conform 2-component soft lacquer.

GLOSS LEVEL deep matt

MIXING RATIO 5:1 with hardener H 132 depending on volume

DELIVERY BATCHES 3 litre

# **2K DECO-SOFT-TOUCH DS 692**

#### PRODUCT PROPERTIES

- dull matt appearance
- agreeable, soft "rubber-like" touch
- an interior coating for transparent or for surfaces coated with JORA-COLOR JC 150

- **■** EN 71, part 3, free of extractable heavy metals
- decopaint-conform



# **1K DECO-OBJECT-OIL DO 670**

#### Decopaint-conform natural oil.

# DELIVERY BATCHES 1, 3 and 10 litre

#### PRODUCT PROPERTIES

- good penetration behaviour
- good water resistance
- high hardness
- excellent stability against shiny areas
- gives the wood an especially natural appearance
- very suitable for coating wood and furniture parts as well as parquet floors
- white inherent colour, brightens the wood shade

#### **TEST STANDARDS**

- EN 71, part 3, free of extractable heavy metals
- DIN 68861-1C chemical resistance
- free of formaldehyde and cobalt-free
- decopaint-conform



#### Decopaint-conform oil-wax combination.

# DELIVERY BATCHES 1, 3 and 10 litre

## **1K DECO-NATURWACHS-OIL DO 680**

#### PRODUCT PROPERTIES

- good water resistance
- the wood shade and the wood structure are particularly emphasized.
- very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs

- EN 71, part 3, free of extractable heavy metals
- **■** DIN 68861-1C chemical resistance
- free of formaldehyde and cobalt-free
- decopaint-conform

# ES-ALL 660 DE COLINE TO STATE OF THE STATE

# **1K+2K DECO-OIL DO 660**



VOC-free 1-component and 2-component oil based on renewable raw materials.

MIXING RATIO
If hardener is added 10:1 with
DECO-OIL-HARDENER 613
depending on volume

DELIVERY BATCHES 1, 3 and 25 litre

#### PRODUCT PROPERTIES

- good grain warmth effect, emphasizes the inherent colour of the wood
- ean be used either with or without hardener
- wery water and dirt repellent
- 🛨 the surface has an open-pore appearance with satin-like gloss
- e contains natural raw materials

#### **TEST STANDARDS**

- EN 71, part 3, free of extractable heavy metals
- **■** DIN 68861-1C chemical resistance
- **■** VOC-free
- decopaint-conform



## 1K+2K DECO-OIL-COLOR DO 662

# SUSTAI-NABLE

Coloured VOC and solvent-reduced 1component and 2-component oil, based on renewable raw materials.

#### COLOURS

white, yellow, green, red, blue, brown, and black

#### MIXING RATIO

If hardener is added 10:1 with DECO-OIL-HARDENER 613 depending on volume

#### **DELIVERY BATCHES**

0,25 litre and 1 litre

#### PRODUCT PROPERTIES

- basic colours can be mixed with each other
- many colour adjustments possible
- no grain raise
- the structural appearance of the wood is maintained
- e contains natural waxes
- easy processing
- very water and dirt repellent

- EN 71, part 3, free of extractable heavy metals
- DIN 68861-1C chemical resistance
- VOC and solvent-reduced
- decopaint-conform

TEMPOFIX-SCHICHTER SG 17-X COSMOLIT-SCHICHTER HS 200X 17 PUR-SCHICHTER H 136X **ACRYPUR-BASE COAT H 23100** GIESS-COLORLUX H 37X 18 - 19JOCOPHEN-DD-LACQUER H 224X JOCOPHEN-BASE COAT H 2010 2K CLASSIC-EXTREME-RESIST CE 894-X HIGH-SOLID-BASE COAT H 4500 20 - 222K JORA-BRILLANT JB 875 HIGH-SOLID-SCHICHTER H 4000 JOCOPAN-ROHHOLZEFFEKTLACK H 1861 2K JORA-BRILLANT-COLOR JBC 855 23 HIGH-SOLID-COLOR H600X **PUR-FÜLLER F 1338** JORA-COLOR JC 150 24 **COLORLUX-METALLIC H 378** CLASSIC-COLOR-CONCENTRATE CCC 100X 1K CLASSICBASE CBM 820 25 - 261K CLASSICBASE CB 823 JORA-CLEAN PLASTIC-CLEANER JCK 960

# FULL EFFECT IN EVERY SITUATION

CLASSICLINE - THE PRACTICE-PROVEN LACQUER SYSTEM FROM JORDAN LACKE

The proven lacquer systems from JORDAN Lacke are presented: Reliable, fast drying and price conscious. CLASSICLINE, because experience delivers the best results.

# Winner State Medical Medical Administration of the control of the

## **TEMPOFIX-SCHICHTER SG 17-X**

#### Solvent-based 1-component NC finish.

#### GLOSS LEVEL SG 17-3G semi-matt, SG 17-5G matt, SG 17-6G deep matt

# DELIVERY BATCHES 5 and 30 litre

#### PRODUCT PROPERTIES

- High filling power
- ■ fast drying
- very good sandability
- easy processing in spraying and curtain coating applications
- anti-slip surfaces with good filling and visually appealing

#### **TEST STANDARDS**

- EN 71, part 3, free of extractable heavy metals
- DIN 53160 resistance to saliva and perspiration



## **COSMOLIT-SCHICHTER HS 200X**

#### PRODUCT PROPERTIES

- easy handling
- safe, fast processing
- 🛨 extremely durable surface quality

#### TEST STANDARDS

- EN 71, part 3, free of extractable heavy metals
- **■** DIN 68861-1B chemical resistance
- DIN 53160 resistance to saliva and perspiration
- **■** PVC resistant

# Transparent one-can lacquer

## with integrated hardener.

#### **GLOSS LEVEL**

HS 2003 semi-matt, HS 2005 matt, HS 2006 deep matt

#### **DELIVERY BATCHES**

25 litre



### **PUR-SCHICHTER H 136X**

# 2-component transparent lacquer on a polyurethane base can be used as primer and top coat.

#### **GLOSS LEVEL**

H 1363 semi-matt, H 1365 matt,

H 1366 deep matt, H 1367 special matt

#### MIXING RATIO

10:1 with hardener H 1362 depending on volume

#### **DELIVERY BATCHES**

5 and 25 litre

### PRODUCT PROPERTIES

- suitable for base and top coats
- excellent levelling properties
- very good filling power
- easy handling
- 🖶 achieves a highly resistant, abrasion-proof surface

- EN 71, part 3, free of extractable heavy metals
- DIN 68861-1B chemical resistance
- DIN 53160 resistance to saliva and perspiration
- PVC resistant



Solvent-based, transparent 2-component primer on a polyurethane base.

MIXING RATIO 10:1 with hardener H 132 depending on volume

DELIVERY BATCHES 10 litre

# **ACRYPUR-BASE COAT H 23100**

#### PRODUCT PROPERTIES

- easy handling
- 🛨 very good filling power
- excellent sanding

#### TEST STANDARDS

- EN 71, part 3, free of extractable heavy metals
- free of formaldehyde



2-component lacquer with excellent transparency and high light fastness.

#### **GLOSS LEVEL**

H 371 glossy, H 373 semi-matt, H 375 matt, H 376 deep matt, H 376-S2 antique matt, H 377 special matt

#### MIXING RATIO

10:1 with hardener H 132 depending on volume

#### **DELIVERY BATCHES**

6 and 25 litre (H 371 only in 10 litre batches)

## **GIESS-COLORLUX H 37X**

#### PRODUCT PROPERTIES

- **■** lightfast
- for curtain coating and spraying
- long pot life (2 3 days)
- recommended for application as a top coat for JORA-COLOR JC 150

- **■** EN 71, part 3, free of extractable heavy metals
- DIN 4102-B1 low flammability
- DIN 68861-1B chemical resistance
- + PVC resistant



## **JOCOPHEN-DD-LACQUER H 224X**

#### PRODUCT PROPERTIES

- recommended use in case of very high demands regarding hardness, resistance to water, alcohol and solvents as well as PVC resistance etc.
- fast drying
- good filling power

#### TEST STANDARDS

- EN 71, part 3, free of extractable heavy metals
- **■** DIN 68861-1B chemical resistance
- DIN 53160 resistance to saliva and perspiration
- PVC resistant
- free of formaldehyde

# Solvent-based 2-component transparent lacquer / top coat with good filling power and fast drying.

#### **GLOSS LEVEL**

H 2243 semi-matt, H 2245 matt,

H 2246 deep matt

#### MIXING RATIO

2:1 with hardener H 2242 depending on volume

#### **DELIVERY BATCHES**

5 litre



## **JOCOPHEN-BASE COAT H 2010**

#### PRODUCT PROPERTIES

- easy processing
- fast drying
- excellent sandability when dry
- thanks to good sealing properties regarding wood ingredients the lacquer is very suitable for coating exotic wood

#### MIXING RATIO

2:1 with hardener H 2242 depending on volume

Solvent-based 2-component primer as well as a sealing primer for ingredient-rich woods.

#### **DELIVERY BATCHES**

5 litre

- EN 71, part 3, free of extractable heavy metals
- free of formaldehyde

# To the state of th

## **2K CLASSIC-EXTREME-RESIST CE 894-X**

Solvent-based 2-component transparent lacquer / top coat for workpieces that are subjected to high mechanical stress indoors.

GLOSS LEVEL 894-5 matt 894-6 deep matt

MIXING RATIO 10:1 with hardener H 132 depending on volume

DELIVERY BATCHES 6 and 25 litre

#### PRODUCT PROPERTIES

- anti-fingerprint
- extremely high resistance to mechanical stress
- suitable for coating surfaces primed with HIGH-SOLID-BASE COAT H 4500
- suitable for coating surfaces primed with JOCOPHEN-BASE COAT H 2010
- suitable for coating surfaces that have been coated with JORA-COLOR JC 150
- fast drying
- easy handling

#### **TEST STANDARDS**

- EN 71, part 3, free of extractable heavy metals
- **■** DIN 68861-1B chemical resistance
- DIN 53160 resistance to saliva and perspiration
- EN ISO 2409-GT O adhesive strength
- PVC resistant



### **HIGH-SOLID-BASE COAT H 4500**

# 2-component polyurethane system with high solid content.

# MIXING RATIO 2:1 with hardener H 4002 depending on volume

DELIVERY BATCHES 5 and 25 litre

#### PRODUCT PROPERTIES

- high filling power
- wery good sanding
- $\,\blacksquare\,$  allows an economic production flow and cost savings of up to 40 %
- used as primer for buffable high-gloss coatings
- 🛨 very good accentuation of the grain

#### TEST STANDARDS

■ DIN 4102-B1 low flammability (in combination with JORA-BRILLANT JB 875)



### **2K JORA-BRILLANT JB 875**

# Transparent brilliant 2-component high-gloss lacquer.

# GLOSS LEVEL high gloss

#### MIXING RATIO

2:1 with hardener H 872 depending on volume or 2:1 with hardener H 874 depending on volume (for fast drying)

### **DELIVERY BATCHES**

5 and 25 litre

#### PRODUCT PROPERTIES

- 🛨 colourless, brilliant high-gloss lacquer
- excellent chemical and mechanical resistance
- 🔢 with transparent surfaces it can be used as a primer and a top coat

#### TEST STANDARDS

- EN 71, part 3, free of extractable heavy metals
- DIN 4102-B1 low flammability
- **■** DIN 68861-1B chemical resistance
- DIN 53160 resistance to saliva and perspiration
- EN ISO 2409-GT O adhesive strength
- free of formaldehyde



2-component transparent varnish on a polyurethane

#### **HIGH-SOLID-SCHICHTER H 4000**

#### PRODUCT PROPERTIES

- fast drying
- excellent filling power
- excellent sandability
- creates a closed porous structure within one day
- high-gloss finishes can be achieved with H 4001 (glossy)

#### GLOSS LEVEL

H 4001 glossy, H 4004 semi-matt, H 4005 matt, H 4007 especially matt

base for priming and final coating.

#### MIXING RATIO

2:1 with hardener H 4002 depending on volume

#### **DELIVERY BATCHES**

10 litre

#### TEST STANDARDS

- EN 71, part 3, free of extractable heavy metals
- **■** DIN 68861-1B chemical resistance
- DIN 53160 resistance to saliva and perspiration

# The Property of the Property o

## **JOCOPAN-ROHHOLZEFFEKTLACK H 1861**

# PRODUCT PROPERTIES

- light inherent colour
- dries up deep matt with a natural effect
- achieves an anti-slipping and resistant surface

#### 2-component special lacquer with natural effect.

# GLOSS LEVEL deep matt


# MIXNG RATIO

2:1 with hardener H 1862 depending on volume

#### **DELIVERY BATCHES**

5 and 25 litre

- EN 71, part 3, free of extractable heavy metals
- DIN 68861-1B chemical resistance
- DIN 53160 resistance to saliva and perspiration



High-gloss finishes as well as deep matt natural effect finishes are trendy in the furniture and interior design field. But only a combination of both creates an impressive contrast which harmonizes perfectly.

The deep matt, transparent lacquer JOCOPAN ROHHOLZ-EFFEKTLACK H 1861 offers the wood optimal protection and presents naturalness in its most beautiful form.

Substrate material: veneered boards or solid wood

#### 1. JOCOPAN-ROHHOLZEFFEKTLACK H 1861


with hardener H 1862 (mixing ratio 2:1 depending on volume)

#### 2. JOCOPAN-ROHHOLZEFFEKTLACK H 1861

with hardener H 1862 (mixing ratio 2:1 depending on volume)

# **RAW WOOD MEETS HIGH-GLOSS**

JOCOPAN-ROHHOLZEFFEKTLACK H 1861 AND JORA-BRILLANT-COLOR JBC 855

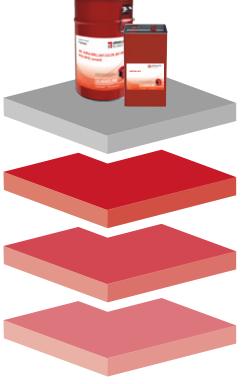

A wooden surface cannot be more brilliant than that! The JORA-BRILLANT-COLOR JBC 855 can be buffed and polished and achieves perfect high-gloss.

Substrate material: MDF board

#### 1. PUR-FÜLLER F 1338

with hardener H 132 (mixing ratio 10:1 depending on volume)

#### 2. HIGH-SOLID-COLOR H6000 (matt coloured lacquer)

with hardener H 6002 (mixing ratio 2:1 depending on volume)

#### 3. JORA-BRILLANT-COLOR JBC 855

with hardener H 872 (mixing ratio 2:1 depending on volume) or with hardener H 874 (mixing-ratio 2:1 depending on volume)

# To And Annual Court

# **2K JORA-BRILLANT-COLOR JBC 855**

#### PRODUCT PROPERTIES

- coloured brilliant high-gloss coating
- excellent chemical and mechanical resistance
- 🖶 able to be buffed and polished after overnight drying

#### Coloured brilliant 2-component high-gloss lacquer.

#### GLOSS LEVEL

high gloss

#### MIXING RATIO

2:1 with hardener H 872 depending on volume or 2:1 with hardener H 874 depending on volume (for fast drying)

#### **DELIVERY BATCHES**

1, 5 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

### TEST STANDARDS

- EN 71, part 3, free of extractable heavy metals
- **■** DIN 4102-B1 low flammability
- **■** DIN 68861-1B chemical resistance
- EN ISO 2409-GT O adhesive strength
- free of formaldehyde



## **HIGH-SOLID-COLOR H 600X**

# 2-component coloured lacquer system with high filling power.

#### **GLOSS LEVELS**

matt (H 6000), especially matt (H 6007)

#### MIXING RATIO

2:1 with hardener H 6002 depending on volume H 6007 depending on volume: 4:1 with hardener DECOHARDENER 612 (decopaint-conform!)

#### **DELIVERY BATCHES**

1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

#### PRODUCT PROPERTIES

- makes it possible to save solvents, costs and time
- metal marking resistant
- solvent-resistant
- 🛨 high scratch and abrasion resistance
- extremely fast drying
- + very high solids percentage

- EN 71, part 3, free of extractable heavy metals
- DIN 4102-B1 low flammability (H 6000 & H 6007 in combination with hardener H 6002)
- DIN 68861-1B chemical resistance
- DIN 53160 resistance to saliva and perspiration
- PVC resistant



# **PUR-FÜLLER F 1338**

Solvent-based 2-component universal filler.

PUR-FÜLLER F1338 (white) PUR-FÜLLER F1338-S (black)

MIXING RATIO 10:1 with hardener H 132 depending on volume

DELIVERY BATCHES 5, 15 and 25 kg

#### PRODUCT PROPERTIES

- fast drying
- very good machine sandability
- good manual sandability
- very good adhesion
- good firmness on vertical surfaces

#### **TEST STANDARDS**

- EN 71, part 3, free of extractable heavy metals
- DIN 4102-B1 low flammability (in combination with JORA-COLOR JC 150 and GIESS-COLORLUX H 37X)
- EN ISO 2409-GT O adhesive strength



## **JORA-COLOR JC 150**

Matt drying up 2-component PUR acrylate coloured lacquer free of aromatic substances.

GLOSS LEVEL matt

MIXING RATIO

10:1 with hardener H 132 depending on volume

**DELIVERY BATCHES** 

1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

#### PRODUCT PROPERTIES

- easy processing
- lightfast
- free of aromatic substances
- excellent levelling properties
- type y good adhesion on difficult surfaces
- 🖪 good chemical and mechanical resistance

#### TEST STANDARDS

- EN 71, part 3, free of extractable heavy metals
- DIN 4102-B1 low flammability (in combination with PUR-FÜLLER F 1338 and hardener H 132)
- DIN 68861-1B chemical resistance
- PVC resistant

# The second secon

### **COLORLUX-METALLIC H 378**

Decorative 2-component metal effect coating.

#### MIXING RATIO

10:1 with hardener H 132 depending on volume

#### **DELIVERY BATCHES**

1, 3, 10 and 25 kg

Colour shades available in 10 metallic shades and special adjustments

#### PRODUCT PROPERTIES

- lightfast
- metal marking resistant
- easy handling
- excellent opacity
- 🗷 available in 10 metallic colour shades and special adjustments

- EN 71, part 3, free of extractable heavy metals
- DIN 68861-1B chemical resistance
- PVC resistant



# COLOUR IN PURE FORM CLASSIC-COLOR-CONCENTRATE

CLASSIC-COLOR-CONCENTRATE are lightfast transparent colour solutions so that you yourself can mix the colours based on our solvent-based transparent lacquers.

CLASSIC-COLOR-CONCENTRATES are available in 8 different colours that can be mixed with each other

**CLASSIC-COLOR-CONCENTRATE 1001, YELLOW** 

CLASSIC-COLOR-CONCENTRATE 1002, ORANGE

**CLASSIC-COLOR-CONCENTRATE 1003, RED** 

**CLASSIC-COLOR-CONCENTRATE 1004, RED-VIOLET** 

**CLASSIC-COLOR-CONCENTRATE 1005, BLUE** 

**CLASSIC-COLOR-CONCENTRATE 1006, GREEN** 

**CLASSIC-COLOR-CONCENTRATE 1008, BROWN** 

**CLASSIC-COLOR-CONCENTRATE 1009, BLACK** 

**CLASSIC-COLOR-CONCENTRATE STS-CC, STARTER SET** 





# 1K CLASSICBASE CBM 820

#### PRODUCT PROPERTIES

excellent adhesion properties on most metal substrates (such as iron, steel, aluminium, copper, etc.)

Transparent adhesive primer for metal.

DELIVERY BATCHES 1 and 4,5 kg



# **1K CLASSICBASE CB 823**

#### PRODUCT PROPERTIES

- igh mechanical bonding with the glass surface
- low quantity to be applied ensures economical use

Adhesive primer for glass.

DELIVERY BATCHES 1 and 6 litre



# **JORA-CLEAN PLASTIC-CLEANER JCK 960**

#### PRODUCT PROPERTIES

- for the efficient removal of adhesive residues, glue residues, traces of adhesive tape as well as ballpoint pen, pencil and felt-tipped pen lines
- also suitable for detaching old stickers
- can be used for nearly all plastic surfaces such as ABS, melamine, PE, PP, or PVC
- suitable for degreasing of surfaces

Plastic cleaner for reliable, gentle, streakfree cleaning of plastic surfaces and edges.

DELIVERY BATCHES 200 ml, 1, 2,5 and 25 litre AQUASTAIN AS 331-333 AQUASTAIN POSITIV ASP 431-433 AQUASTAIN-COLOR ASC 531/533 CLASSICSTAIN CS 731-833

28 - 29



COLOURFUL
POSSIBILITIES
STAINLINE – THE STAIN SYSTEMS
FROM JORDAN LACKE



Water-based, ready to use wood stain for several wood types, without emphasized wetting of the pores.

DELIVERY BATCHES base colours 1 and 5 litre colour shades from our colour card and special shades 1, 5 and 25 litre

### **AQUASTAIN AS 331-333**

#### PRODUCT PROPERTIES

- brilliant stains without emphasized wetting of the pores
- all colour shades can be mixed with each other
- 🛨 can be applied in a spraying process, with stain brush or sponge
- ightharpoonup mild odour and free of toxic substances

#### AVAILABLE AS

- AQUASTAIN AS 331 in 5 base colours
- AQUASTAIN AS 332 in 42 card shades
- AQUASTAIN AS 333 for all special requirements
- with Aquabrightener 301 it is possible to lighten the surface
- available as starter set



Water-based, ready to use evolution stain for spraying.

#### **DELIVERY BATCHES**

base colours 1 and 5 litre colour shades from our colour card and special shades 1, 5 and 25 litre

## **AQUASTAIN POSITIVE ASP 431-433**

#### PRODUCT PROPERTIES

- positive stain appearance
- available in 8 base colours that can be mixed with each other
- application in a spraying process without wiping
- mild odour and free of toxic substances
- extremely short evolution time (4 to 5 hours at approx. 20°C room temperature)

#### **AVAILABLE AS**

- AQUASTAIN POSITIV ASP 431 in 8 base colours
- AQUASTAIN POSITIV ASP 432 in 15 card shades
- AQUASTAIN POSITIV ASP 433 for all special requirements
- with AQUASTAIN-POSITIV-BRIGHTENER 401 colourless or AQUASTAIN-POSITIV ASP 431-0 white it is possible to lighten a surface
- available as starter set





Water-based, ready to use pigmented stain.

# **AQUASTAIN-COLOR ASC 531/533**

- easy processing

PRODUCT PROPERTIES

- light fast
- bright, intense colours
- no grain warmth effect
- (no washing out of the pigments)
- as well as under UV lacquers (no change in colour of the stain)
- all colour shades can be mixed with each other

#### AVAILABLE AS

- AQUASTAIN-COLOR ASC 531 in 9 base colours
- AQUASTAIN-COLOR ASC 533 for all special requirements
- the colour intensity can be reduced with colourless base ASC 501

# special shades: 1, 5 and 25 litre

**DELIVERY BATCHES** 

base colours: 1 and 5 litre



#### Solvent-based stain for spraying and wiping.

#### **DELIVERY BATCHES**

base colours 1, 3 and 12 litre colour shades from our colour card 1, 3 and 12 litre special shades 1, 3, 12 and 25 litre

## **CLASSICSTAIN CS 731-833**

#### PRODUCT PROPERTIES

- 🛨 available in 6 base colours that can be mixed with each other
- ean be applied in a spraying process, with stain brush or sponge
- a pore-emphasized stain appearance is generated with the brightener CS 700
- can be used as a fast drying spraying stain with the brightener CS 800

#### **AVAILABLE AS**

- CLASSICSTAIN CS 731 in 6 base colours
- ELASSICSTAIN CS 732 in 21 card shades
- CLASSICSTAIN CS 733 for all special requirements
- available as starter set





# FOR DURABLE FLOORS PARQUETLINE - THE PROTECTING COATING SYSTEM FROM JORDAN



Water-based joint filler, high in solid contents for fast filling of joints and deepenings in wooden floors.

**DELIVERY BATCHES** 5 litre

## **1K ECO-JOINT-FILL EF 510**

#### JOINT FILLER

#### PRODUCT PROPERTIES

- extremely good filling properties
- environmentally friendly
- odourless
- extremely fast drying
- good sanding properties
- for joints up to 3 mm wide (must be filled with wood dust)

#### TEST STANDARDS

GISCODE: W2+



High-quality, water-based 1-component priming.

#### **DELIVERY BATCHES**

5 litre

# **1K ECO-BASE EB 500**

## PARQUET PRIMER

#### PRODUCT PROPERTIES

- as base coat for 1-component ECO-FINISH EF 55X
- effective reduction of the risk of joint bonding
- practically odourless
- easy handling
- very good levelling properties
- does not contain harmful substances
- developed acc. to REACH

#### **TEST STANDARDS**

- EN 71, part 3, free of extractable heavy metals
- EN ISO 2409-GT O adhesive strength
- DiBt-approval
- GISCODE: W2+

- decopaint-conform



1-component water-based lacquer for parquet floor surfaces in living and public areas.

GLOSS LEVEL semi-matt (EF 553) matt (EF 555)

#### **DELIVERY BATCHES**

5 litre

# **1K ECO-FINISH EF 55X**

## PARQUET LACQUER

#### **PRODUCT PROPERTIES**

- good abrasion and wear resistance
- easy handling
- very good levelling properties
- resistant to common household chemicals
- does not contain harmful substances
- + developed acc. to REACH

- EN 71, part 3, free of extractable heavy metals
- resistant to cream
- EN ISO 2409-GT O adhesive strength
- DIBt-approval
- GISCODE: W2+
- decopaint-conform





1-component water-based lacquer

**GLOSS LEVEL** 

**DELIVERY BATCHES** 

matt

5 litre

for parquet floor surfaces in living areas.

## **1K CLASSIC-FINISH CF 525**

#### PAROUET LACOUER

#### PRODUCT PROPERTIES

- easy handling
- very good levelling properties
- resistant to common household chemicals
- does not contain harmful substances
- developed acc. to REACH

#### **TEST STANDARDS**

- EN 71, part 3, free of extractable heavy metals
- EN ISO 2409-GT O adhesive strength
- decopaint-conform

- **■** GISCODE: W2+

## **2K CLASSIC-FINISH CF 545**

### PARQUET LACQUER

#### PRODUCT PROPERTIES

- good abrasion and wear resistance
- easy handling
- very good levelling properties
- resistant to common household chemicals
- + does not contain harmful substances

### developed acc. to REACH

#### **TEST STANDARDS**

- EN 71, part 3, free of extractable heavy metals
- EN ISO 2409-GT O adhesive strength
- GISCODE: W2+
- decopaint-conform

## **GLOSS LEVEL**

and public areas.

matt

#### MIXING RATIO

20:1 with hardener CLASSICHARDENER CH 541 depending on volume

2-component water-based lacquer

for parquet floor surfaces in living

#### **DELIVERY BATCHES**

4,75 litre

# IK ECO-HARTWACHS-FINISH

# **1K ECO-HARTWACHS-FINISH EHF 570**

## WAX-OIL

### PRODUCT PROPERTIES

- simple processing
- extra good penetration
- + very good water resistance
- good accentuation of the wood surface
- very good levelling properties


## **TEST STANDARDS**

- EN 71, part 3, free of extractable heavy metals
- DIN 68861-1C chemical resistance
- Complies with GISCODE: Ö 60
- Free from harmful substances such as: NMP, APEO



1-component wax oil for surface treatment of parquet floors in living and public areas.

# **DELIVERY BATCHES**






JORA-CLEAN BASIC CLEANER JCG 920 JORA-CARE MAINTENANCE AGENT JCW 930 JORA-CARE WAX POLISH JCW 940 JORA-CARE MAINTENANCE OIL JCP 950 JORA-CARE MAINTENANCE OIL JCP 955



The CARELINE products from JORDAN Lacke do not only maintain the surfaces but they also ensure lasting value.

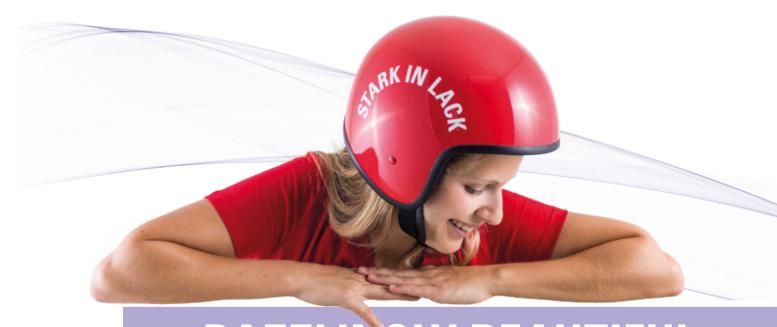

# DAZZLINGLY BEAUTIFUL CARELINE - THE CARE AND CLEANING PRODUCTS FROM JORDAN



# JORA-CLEAN BASIC CLEANER

JCG 920

#### PRODUCT PROPERTIES

- eleaning agent for very dirty surfaces (such as floors)
- suitable for removing old coats of water-based cleaning products
- suitable for removing stubborn dirt on sealed parquet

Highly effective cleaning agent for surfaces that are very susceptible to soiling.

DELIVERY BATCHES 200 ml and 1 litre



# JORA-CARE MAINTENANCE AGENT JCW 930

#### PRODUCT PROPERTIES

- 🛨 based on natural jojoba oil
- suitable for current maintenance care of oiled surfaces
- especially suitable for the care of furniture and lightly stressed parquet floors
- + cleans with the power of oranges

Natural care product for regular use.

DELIVERY BATCHES 200 ml and 1 litre



# JORA-CARE WAX POLISH JCW 940

### PRODUCT PROPERTIES

- liquid wax mixture
- highly economical, 1 litre is sufficient for approx. 200m²
- suitable for the care of sealed parquet floors
- especially suitable for the first care of parquet floors
- + ensures efficient edges protection
- ensures a thin protective film on the surface

Easy to handle wax polish with protecting properties for sealed surfaces.

DELIVERY BATCHES 200 ml and 1 litre



Versatile care oil with short drying time for oiled surfaces.

DELIVERY BATCHES 200 ml and 1 litre

# **JORA-CARE MAINTENANCE OIL** JCP 950

#### PRODUCT PROPERTIES

- suitable for the first and maintenance care of oiled surfaces
- short drying time
- suitable for regular freshening up of oiled surfaces



# Versatile, waterbased care oil with short drying time for oiled surfaces.

DELIVERY BATCHES 200 ml and 1 litre

# **JORA-CARE MAINTENANCE OIL** JCP 955

#### PRODUCT PROPERTIES

- suitable for the first and maintenance care of oiled surfaces
- short drying time
- et contains natural carnauba wax
- free of VOC and cobalt-free
- suitable for regular freshening up of oiled surfaces







### **PLANTAG Coatings GmbH**

Plantagenweg 34–38 32758 Detmold GERMANY

Fon +49 5231 6002 661 Fax +49 5231 6002 9661 E-Mail info@jordanlacke.de

JORDAN Lacke — a brand of PLANTAG Coatings GmbH