

FOR INDOORS, OUTDOORS, TOP AND BOTTOM ...

THE PRODUCT OVERVIEW FROM JORDAN LACKE 2024/2025



SHOW WHAT YOU ARE ABLE TO DO!
WWW.JORDANLACKE.DE

JORDAN Lacke is a brand of **PLANTAG Coatings GmbH**. Based on the strong alliance of this group, we have a very good network of subsidiaries and distributors as well as our own innovative laboratories. We ensure short ways to our customers on the one hand, but also a broad expertise and innovative surface solutions using the most modern raw materials.

Based on this, we have been developing high-quality products for over 125 years. In all those years, we have established a firm place for ourselves with joineries and are proud of a variety of satisfied and long-standing partners.

After all, you are at the centre of everything we do. For carpenters, there are a multitude of application areas and uses for our products in everyday life. And so our new application-oriented product overview is designed to help you in practice to quickly find the perfect surface solution.

Discover on the next pages what has impressed our customers and partners for over 125 years. Find new trends and show what you can do with the **JORDAN Lacke** product world.



DISCOVER JORDAN LACKE AND OUR WIDE RANGE OF PRODUCTS FOR ALL APPLICATIONS

**Quick over-
view from
page 78!**



FOR FURNITURE

8 – 27

For furniture of all kinds, we offer the right products for your individual surfaces, from clear and coloured lacquers to metallic shades, oils and stains.

FURNITURE

FOR KITCHENS & BATHROOMS

28 – 37

Kitchen and bathroom furniture surfaces have special requirements. Select from our product portfolio lacquers, oils and stains for the creation of high-quality surfaces.

KITCHEN &
BATH

FOR PARQUET & STAIRS

38 – 45

To protect parquet floors and stairs, we offer a wide range of products for heavily used surfaces. Dirt-, scratch- and abrasion-resistant - for the highest demands.

PARQUET &
STAIRS

FOR DOORS

46 – 55

Water-based lacquers and oils for interior doors, door panels and frames. Our portfolio offers opaque, glazing and clear lacquers as well as oiled surfaces.

DOORS

FOR INTERIOR FITTINGS

56 – 65

For a healthy indoor climate - with our decopaint-compliant lacquers, oils and stains for coating wooden ceilings, wall panelling, etc. Choose from a wide range of products.

INTERIOR
FITTINGS

FOR OUTDOOR USE

66 – 69

Our biocide- and pesticide-free wood preservative for exterior use not only protects wood surfaces, but also the environment: effective against animal and plant pests.

OUTDOOR

FOR CARE & CLEANING

70 – 75

Whether by hand or machine: with our cleaning and care products, you can maintain surfaces and ensure a long-lasting value preservation of furniture and floors.

CARE &
CLEANING

ADDITIONAL PRODUCTS

76 – 77

Our wide range of additional products offers further possibilities for surface coating with effect pastes, colour concentrates and additives.

ADDITIONAL
PRODUCTS

COMPETENCE IN LACQUER LOCALLY PRESENT

JORDAN LACKE - YOUR EXPERT
IN TERMS OF COATINGS

1 COMPETENCE IN LACQUER FOR
ROBUST SURFACES AND HIGHEST RESISTANCE.
THE PERFECT PROTECTION

2 COMPETENCE IN LACQUER FOR
FINE AND HIGH-QUALITY SURFACES.
THE PERFECT FINISH

3 COMPETENCE IN LACQUER FOR
A VARIETY OF DESIGN POSSIBILITIES.
THE PERFECT DESIGN

4 COMPETENCE IN LACQUER FOR
FUNCTIONAL SURFACES.
THE PERFECT FUNCTION

5 COMPETENCE FOR THE ENVIRONMENT
CONSCIOUS ACTION
BEYOND THE SURFACE

Because it is important what you put on top:
The PCG helmet is the sign of highest quality regarding
surfaces. Protection, finish, design, and function - our
helmet serves as a symbol for all these features.

In our company you will always find your direct
contact person, be it inhouse or among our field staff.
We offer commercial and technical customer service.
Our international experts support you worldwide.

Discover our customer service at jordanlacke.de/en/
and quickly find assistance in your vicinity.

OUR FIELD STAFF IS:

- + always quickly available locally
- + working for you at all times
- + competent and friendly
- + always professionally up to date





A STRONG GROUP WORLDWIDE

CONCENTRATED COMPETENCE FOR
A VERSATILE PRODUCT PORTFOLIO

OUR INTERNATIONAL SUBSIDIARIES:

- **BENELUX** PLANTAG COATINGS GROEP B.V.
- **BRASIL** PLANTAG DO BRASIL Ltda
- **INDIA** PLANTAG COATINGS INDIA Pvt. Ltd.
- **POLAND** PLANTAG Sp. z.o.o.
- **ROMANIA** PLANTAG ROMANIA S.R.L.
- **SWITZERLAND** PLANTAG SCHWEIZ GMBH

OUR ADVANTAGES AT A GLANCE:

- +
- +
- +
- +
- +
- +
- +
- +

GUITAR DISPLAY



KINDERGARTEN IN FRAUENFELD



MAISONETTE APARTMENT



JORDAN LACKE IN ACTION

OUR REFERENCES

RESTAURANT MUS BAR & VIEW IN POSEN





COUNCIL CHAMBER OF THE ECB IN FRANKFURT



PARQUET FLOORING IN THE OMEGA MUSEUM IN BIEL




LOG HOUSE IN THE DISTRICT OF GÜNZBURG



PIZZERIA FORNI ROSSI IN POSEN

For furniture of all kinds, we offer the right products for your individual surfaces, from clear and coloured lacquers to metallic shades, stains and oils.




CHANGES START SMALL

Did you know that we deployed our first all-electric company vehicle back in 2012?
PCG – Beyond the surface



SURFACES WITH STYLE

LACQUERS AND OILS FOR FURNITURE



8-27

1C AQUA-MAGIC-BASE JB7163-0001
1C AQUA-MAGIC-FILLER JB7430-0X01
1C AQUA-MAGIC-COLOR JK7462-XXXX
1C AQUA-MAGIC-CLEAR JM7475-X
1C AQUA-MAGIC-CLEAR JM7477-X
1C AQUA-OIL-EFFECT JF7455-1
1C+2C AQUASTEP AS 490
2C AQUA-NATUREFFEKT AN 420

2C PUR-FILLER F 1338
2C ACRYPUR-BASE COAT H 23100
2C JOCOPHEN-BASE COAT H 2010
2C HIGH-SOLID-BASE COAT H 4500
1C CLASSICBASE CBM 820
1C CLASSICBASE CB 823
2C JORA-BRILLANT-COLOR JBC 855
2C HIGH-SOLID-COLOR H 600X
2C JORA-COLOR JC 150
2C COLORLUX-METALLIC H 378
1C TEMPOFIX-SCHICHTER SG 17-X
1C COSMOLIT-SCHICHTER HS 200X
2C PUR-SCHICHTER H 136X
2C HIGH-SOLID-SCHICHTER H 400X
2C JOCOPHEN-DD-LACK H 224X
2C CLASSIC-EXTREME-RESIST CE 894-X
2C GIESS-COLORLUX H 37X
2C JORA-ULTRA-MATT-RESIST JF2492-0000
2C JORA-BRILLANT JB 875
2C JOCOPAN-ROHHOLZEFFEKTLACK H 1861

1C DECO-OIL-COLOR DO 630
1C DECO-OIL DO 640C
1C+2C DECO-OIL DO 660
1C DECO-OBJECT-OIL DO 670
1C DECO-NATURWACHS-OIL DO 680
1C ECO-HARTWACHS-FINISH EHF 570

HYDROSTAIN-MODULAR JC73X0-XXXX
CLASSICSTAIN CS 731-833



1C AQUA-MAGIC-BASE JB7163-0001

NEW!

Water-based 1-component insulating filler with excellent insulating effect and good sanding properties

DELIVERY BATCHES
7 and 15 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + excellent insulating effect with woods that are rich in resin content
- + good sandability
- + excellent filling properties
- + overcoatable with all our colour lacquer systems from JORDAN Lacke

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-MAGIC-FILLER JB7430-0X01

Water-based 1-component universal filler with excellent filling power and good sandability

JB7430-0001 (white)
JB7430-0901 (black)

DELIVERY BATCHES
7 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + overcoatable with all our colour lacquer systems from JORDAN Lacke
- + excellently sandable
- + excellent filling power
- + perfect adhesion
- + excellent firmness on vertical surfaces

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462-XXXX)
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C AQUA-MAGIC-COLOR JK7462-XXXX

Water-based 1-component coloured lacquer harmonising quality demand and environmental awareness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS
Thinner: Water
Cleaning: Water I AC 460


PRODUKTEIGENSCHAFTEN

- + very high light stability
- + very high opacity
- + very good sanding marks coverage
- + high abrasion and scratch resistance
- + ausgezeichneter Verlauf
- + einfache Handhabung

NORMEN UND PRÜFUNGEN

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in the Colormix color mixing program



1C AQUA-MAGIC-CLEAR JM7475-X

Water-based 1-component clear lacquer with high scratch and abrasion resistance

GLOSS LEVEL
JM7475-2 (deep matt)
JM7475-3 (matt)
JM7475-4 (semi-matt)

DELIVERY BATCHES
10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water I AC 460


PRODUCT PROPERTIES

- + very high light stability
- + excellent transparency
- + high abrasion and scratch resistance
- + very good accentuation of the grain
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C MAGIC-CLEAR JM7477-X

Water-based 1-component clear lacquer for coating off porous woods

GLOSS LEVEL
JM7477-2 (deep matt)
JM7477-3 (matt)
JM7477-4 (semi-matt)

DELIVERY BATCHES
10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + modified variant of JM7475-X especially for porous woods
- + very high light stability
- + particularly high transparency
- + very good accentuation of the grain
- + easy to use


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-OIL-EFFECT JF7455-1

NEW!

Transparent, water-based 1-component natural effect lacquer with high resistance

GLOSS LEVEL
natural matt

DELIVERY BATCHES
5, 10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + pleasant touch
- + high light stability
- + high resistance
- + excellent transparency
- + easy to use


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C+2C AQUASTEP AS 490

Transparent, water-based stair lacquer can be used as 1C and 2C lacquer

GLOSS LEVEL

matt (-5)
semi-matt (-3)

MIXING RATIO

10:1 nach Volumen mit AQUAHARDENER AH 410

DELIVERY BATCHES

10 and 25 kg

ADDITIONALS

Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + excellent light stability and good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + slip resistance class R10 in combination with AQUA PRO-GRIP APG 402
- + resistance to cream
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C AQUA-NATUREFFEKT AN 420

Water-based 2-component natural effect lacquer with high resistance

GLOSS LEVEL

natural matt

MIXING RATIO

10:1 by volume with AQUAHARDENER AH 410

DELIVERY BATCHES

5 and 25 kg

ADDITIONALS

Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + high resistance
- + very good chemical and mechanical resistance
- + dries to a raw wood-like natural matt finish
- + pleasant touch

STANDARDS AND TESTS

- + following DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C PUR-FILLER F 1338

Solvent-based, 2-component universal filler

PUR-FÜLLER F 1338 (white)
PUR-FÜLLER F 1338-S (black)

MIXING RATIO
10:1 by volume with hardener H 132

DELIVERY BATCHES
5, 15 and 25 kg

ADDITIONALS
THINNER: V 2244 | V 1313
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + fast drying
- + very good machine sandability
- + good manual sandability
- + very good adhesion
- + good firmness on vertical surfaces


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
(in combination with JORA-COLOR JC 150 and GIESS-COLORLUX H 37X)
- + EN ISO 2409-GT 0 adhesive strength

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C ACRYPUR-BASE COAT H 23100

Solvent-based, transparent 2-component primer on a polyurethane base

MIXING RATIO
10:1 by volume with hardener H 132

DELIVERY BATCHES
10 litre

ADDITIONALS
Thinner: V 2244
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + easy handling
- + very good filling power
- + excellent sanding

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C JOCOPHEN-BASE COAT H 2010

Solvent-based 2-component primer as well as a sealing primer for ingredient-rich woods

DELIVERY BATCHES

2:1 by volume with hardener H 2242

LIEFERGRÖSSEN

5 litre

ADDITIONALS

Thinner: V 2244

Retarder: V 19

Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + easy to use
- + fast drying
- + excellent sandability when dry
- + Due to very good sealing properties against wood ingredients, the material is excellently suited for coating exotic woods

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C HIGH-SOLID-BASE COAT H 4500

Solvent-based 2-component polyurethane system with high solids content

MIXING RATIO

2:1 by volume with hardener H 4002

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Thinner: V 2244

Retarder: V 19

Cleaning: V 2244 | V 803

PRODUCT PROPERTIES

- + very high solids content
- + ensures solvent, cost and time savings
- + high filling power
- + very good sanding
- + used as base coat for buffable high gloss coatings
- + very good accentuation of the grain

STANDARDS AND TESTS

- + DIN 4102-B1 low flammability
(in combination with JORA-BRILLANT JB 875)

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C CLASSICBASE CBM 820

PRODUCT PROPERTIES

- + excellent adhesion properties on most metal substrates (such as iron, steel, aluminium, copper, etc.)


Solvent-based adhesive primer for metal

CLASSICBASE CBM 820 (transparent)
CLASSICBASE CBM 820-G (grey)

DELIVERY BATCHES
0,9 and 4,5 kg

ADDITIONALS
Thinner: V 2244
Cleaning: V 1415 | V 2244

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C CLASSICBASE CB 823

PRODUCT PROPERTIES


- + high mechanical bonding with the glass surface
- + low application quantity ensures economical use

Solvent-based adhesive primer for glass

DELIVERY BATCHES
1 litre

ADDITIONALS
Cleaning: V 1415 | V 2244 | V 803

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C JORA-BRILLANT-COLOR JBC 855

Solvent-based 2-component high-gloss lacquer with brilliant colours

GLOSS LEVEL
high gloss

MIXING RATIO
2:1 by volume with
BRILLIANT-HARDENER JH2870-0

DELIVERY BATCHES
1, 5 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS
Thinner: V 2083
Cleaning: V 2244 | V 803 | V 2083

PRODUCT PROPERTIES

- + coloured, brilliant high-gloss coating
- + excellent chemical and mechanical resistance
- + can be buffed and polished after overnight drying

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C HIGH-SOLID-COLOR H 600X

Solvent-based 2-component coloured lacquer system with high filling power

GLOSS LEVELS
H 6000 matt
H 6007 special matt

MIXING RATIO
2:1 by volume with hardener H 6002

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS
THINNER: V 2244
Retarder: V 19
Cleaning: V 2244 | V 803

PRODUCT PROPERTIES

- + very high solids content
- + ensures solvent, cost and time savings
- + metal marking resistant
- + solvent-resistant
- + high scratch and abrasion resistance
- + extremely fast drying

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in the Colormix color mixing program



2C JORA-COLOR JC 150

Solvent-based, matt 2-component PUR acrylate coloured lacquer free of aromatic substances

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with hardener H 132

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, metallic shades, etc.

ADDITIONALS
Thinner: V 2244
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + good sanding marks coverage
- + easy handling
- + lightfast
- + free of aromatic substances
- + excellent levelling properties
- + very good adhesion on difficult surfaces
- + good chemical and mechanical resistance
- + suitable for children's toys

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
(in combination with PUR-FILLER F 1338 and hardener H 132)
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in the Colormix color mixing program



2C COLORLUX-METALLIC H 378

Solvent-based 2-component lacquer with a decorative metal effect

MIXING RATIO
10:1 by volume with hardener H 132

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available as special adjustments

ADDITIONALS
Thinner: V 2244
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + lightfast
- + metal marking resistant
- + easy handling
- + excellent opacity


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Metallic shades for furniture surfaces can be self-mixed with JORA-COLOR JC 150



1C TEMPOFIX-SCHICHTER SG 17-X

Solvent-based 1-component NC multi-layer coating, usable as primer and top coat

GLOSS LEVEL

SG 17-3G semi-matt, SG 17-5G matt
SG 17-6G deep matt

DELIVERY BATCHES

5 and 30 litre

ADDITIONALS

Thinner: V 1415
Retarder: V 19
Cleaning: V 1415 | V 803

PRODUCT PROPERTIES

- + high filling capacity
- + fast drying
- + very good sandability
- + easy processing in spraying and curtain coating applications
- + beautiful surface with smooth touch


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 53160 resistance to saliva and perspiration

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C COSMOLIT-SCHICHTER HS 200X

Solvent-based, transparent one-can lacquer with integrated hardener

GLOSS LEVEL

HS 2003 semi-matt, HS 2005 matt
HS 2006 deep matt

DELIVERY BATCHES

25 litre

ADDITIONALS

Thinner: V 1415
Retarder: V 19
Cleaning: V 1415 | V 803

PRODUCT PROPERTIES

- + easy handling
- + fast processing
- + extremely durable surface quality


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C PUR-SCHICHTER H 136X

Solvent-based 2-component clear lacquer on a polyurethane base, usable as primer and topcoat

GLOSS LEVEL

H 1363 semi-matt, H 1365 matt

H 1366 deep matt, H 1367 special matt

MIXING RATIO

10:1 by volume with hardener H 1362

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Thinner: V 2244

Retarder: V 19

Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + suitable as primer and top
- + excellent levelling properties
- + very good filling power
- + easy handling
- + achieves a highly resistant, abrasion-proof surface

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C HIGH-SOLID-SCHICHTER H 400X

Solvent-based 2-component clear lacquer on a polyurethane base, usable as primer and topcoat

GLOSS LEVEL

H 4001 glossy, H 4004 semi-matt

H 4005 matt, H 4007 special matt

MIXING RATIO

2:1 by volume with hardener H 4002

DELIVERY BATCHES

10 litre

ADDITIONALS

Thinner: V 2244

Retarder: V 19

Cleaning: V 2244 | V 803

PRODUCT PROPERTIES

- + fast drying
- + excellent filling power
- + excellent sandability
- + creates a closed porous structure within one day
- + high-gloss finishes can be achieved with H 4001 (glossy)

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C JOCOPHEN-DD-LACK H 224X

Solvent-based 2-component clear lacquer / top coat with good filling power and fast drying

GLOSS LEVEL

H 2243 semi-matt, H 2245 matt
H 2246 deep matt

MIXING RATIO

2:1 by volume with hardener H 2242

DELIVERY BATCHES

5 litre

ADDITIONALS

Thinner: V 2244
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + very good chemical resistance
- + recommended use in case of very high demands regarding hardness, resistance to water, alcohol and solvents as well as PVC resistance
- + fast drying
- + good filling power

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C CLASSIC-EXTREME-RESIST CE 894-X

Solvent-based 2-component clear lacquer / top coat for interior workpieces exposed to high mechanical stresses

GLOSS LEVEL

CE 894-5 matt
CE 894-6 deep matt

MIXING RATIO

10:1 by volume with hardener H 132

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Thinner: V 2244
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + anti-fingerprint
- + extremely high resistance to mechanical stress
- + suitable for coating surfaces primed with HIGH-SOLID-BASE COAT H 4500
- + suitable for coating surfaces primed with JOCOPHEN BASE COAT H 2010
- + suitable for coating surfaces that have been coated with JORA-COLOR JC 150
- + fast drying
- + easy handling

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C GIESS-COLORLUX H 37X

Solvent-based 2-component clear lacquer with excellent transparency and high light fastness

GLOSS LEVEL

H 371 glossy, H 373 semi-matt, H 375 matt, H 376 deep matt, H 376-S2 super matt, H 377 special matt

MIXING RATIO

10:1 by volume with hardener H 132

DELIVERY BATCHES

5 and 25 litre (H 371 only in 10 litre batches)

ADDITIONALS

Thinner: V 2244

Retarder: V 19

Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + lightfast
- + for curtain coating and spraying
- + long pot life (2 – 3 days)
- + recommended for application as a top coat for JORA-COLOR JC 150


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C JORA-ULTRA-MATT-RESIST JF2492-1

NEW!

Solvent-based, ultra-matt 2-component clear lacquer / top coat with very good gloss stability

GLOSS LEVEL

natural matt

MIXING RATIO

100:15 by volume with hardener H 132 (JH2132-0)

DELIVERY BATCHES

5 and 25 litre

ADDITIONALS

Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + ultra matt gloss level (similar to excimer technology)
- + excellent scratch resistance (anti-scratch)
- + anti-fingerprint
- + very pleasant touch
- + extremely good gloss stability
- + very high chemical resistance
- + suitable for coating surfaces primed with GIESS-COLORLUX H 376 and H 377
- + for light coloured surfaces

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C JORA-BRILLANT JB 875

PRODUCT PROPERTIES

- + transparent, brilliant high-gloss lacquer
- + excellent chemical and mechanical resistance
- + for transparent surfaces, can be used as a base and a top coat

Solvent-based 2-component high-gloss lacquer with brilliant transparency

GLOSS LEVEL
high gloss

MIXING RATIO
2:1 by volume with
BRILLIANT-HARDENER JH2870-0

DELIVERY BATCHES
5 and 25 litre

ADDITIONALS
Thinner: V 2083
Cleaning: V 2083 | V 2244 | V 803

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C JOCOPAN-ROHHOLZEFFEKTLACK H 1861

PRODUCT PROPERTIES

- + light inherent colour
- + dries up with a natural effect
- + achieves a smooth to touch surface with high resistance properties

Solvent-based 2-component special lacquer with natural effect

GLOSS LEVEL
natural matt

MIXING RATIO
2:1 by volume with hardener H 1862

DELIVERY BATCHES
5 and 25 litre

ADDITIONALS
Thinner: V 2244
Cleaning: V 1415 | V 2244 | V 803

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C DECO-OIL-COLOR DO 630

NEW!

Decopaint-compliant, coloured oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
0,25, 1 und 5 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244
V 608 | V 2249


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades
- + colour shades can be mixed with each other


STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C DECO-OIL DO 640C

NEW!

Decopaint-compliant, transparent oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 5, 10 and 30 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244
V 608 | V 2249


SCOPE OF APPLICATION

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C+2C DECO-OIL DO 660

VOC-FREE

VOC-free 1-component and 2-component oil, based on renewable raw materials

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with DECO-OIL-HARDENER DH 613

DELIVERY BATCHES
1, 3 and 25 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 2249 | V 608


PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + can be used with or without hardener
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 20
- + VOC-free
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.
A 2-component application is recommended for parquet and stairs.



1C DECO-OBJECT-OIL DO 670

Decopaint-compliant natural oil

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 803 | V 608


PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C DECO-NATURWACHS-OIL DO 680

Decopaint-compliant oil-wax combination

GLOSS LEVEL
semi-matt to matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 803 | V 608


PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

ANWENDUNG



AUFTRAGSART



Note: Consult a technical advisor for application information.



1C ECO-HARTWACHS-FINISH EHF 570

1-component wax oil for surface treatment of parquet floors and stair components in living areas

GLOSS LEVEL
matt

DELIVERY BATCHES
1 and 3 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 608

PRODUCT PROPERTIES

- + transparent
- + easy to use
- + extremely good penetration behaviour
- + very good water resistance
- + good accentuation of the wood surface
- + very good levelling properties

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





HYDROSTAIN-MODULAR JC73X0-XXXX

NEW!

Modular water-based stain system that combines various staining effects

DELIVERY BATCHES

Base components: 1, 5 and 25 litre

Dye solutions: 1 and 5 litre

Pigment solutions: 1 and 5 litre

Special shades: 1, 5 and 25 litre

ADDITIONALS

Cleaning: Water

With the HYDROSTAIN-MODULAR-DIVERSE JC7350-XXXX, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lichtecht in Kombination mit Pigmentlösung
- + brilliant shades in combination with dye solution

BASE COMPONENTS AVAILABLE AS:

HYDROSTAIN-MODULAR-STANDARD JC7320-XXXX (STAIN FOR SPRAYING WITHOUT WIPING)

- + easy to use
- + universally applicable
- + dye and pigment solutions can be combined


HYDROSTAIN-MODULAR-POSITIVE JC7330-XXXX (STAIN FOR SPRAYING WITHOUT WIPING)

- + achieves an excellent, positive stain pattern
- + most suitable for use on softwoods
- + achieves brilliant colour results in combination with dye solutions


HYDROSTAIN-MODULAR-RUSTIC JC7340-XXXX (RUSTIC STAIN FOR SPRAYING AND WIPING)

- + intensive pore structure
- + ideal for use on porous woods
- + dye and pigment solutions can be combined

SCOPE OF APPLICATION



TYPE OF APPLICATION



CLASSICSTAIN CS 731-833

Solvent-based stain for spraying and wiping

DELIVERY BATCHES

Basic shades 1, 3 and 10 litre

Card shades 1, 3 and 10 litre

Special shades 1, 3, 10 and 25 litre

ADDITIONALS

Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + all shades can be mixed with each other
- + can be applied in a spraying process, with stain brush or sponge
- + a pore-emphasized stain appearance is generated with the brightener CS 700
- + can be used as a fast drying spraying stain with the brightener CS 800

AVAILABLE AS

- + CLASSICSTAIN CS 731 in 6 basic shades
- + CLASSICSTAIN CS 732 in 12 card shades
- + CLASSICSTAIN CS 733 for all special shades
- + CLASSICSTAIN CS 832 in 9 card shades
- + CLASSICSTAIN CS 833 for all special shades
- + available as starter set

SCOPE OF APPLICATION



TYPE OF APPLICATION



Kitchen and bathroom furniture surfaces have special requirements. Select from our product portfolio lacquers, oils and stains for the creation of high-quality surfaces.



28 – 37

2C PUR-FILLER F 1338
2C ACRYPUR-BASE COAT H 23100
2C JOCOPHEN-BASE COAT H 2010
2C HIGH-SOLID-COLOR H 600X
2C COLORLUX-METALLIC H 378
2C PUR-SCHICHTER H 136X
2C JOCOPHEN-DD-LACK H 224X
2C GIESS-COLORLUX H 37X
2C CLASSIC-EXTREME-RESIST CE 894-X
2C JORA-ULTRA-MATT-RESIST JF2492-0000
2C JORA-BRILLANT JB 875

1C DECO-OIL DO 640C
1C+2C DECO-OIL DO 660
1C DECO-OBJECT-OIL DO 670
1C DECO-NATURWACHS-OIL DO 680

CLASSICSTAIN CS 731-833



**NO PROBLEM
WITH HUMIDITY**
SURFACES FOR KITCHEN AND BATHROOM



2C PUR-FILLER F 1338

Solvent-based, 2-component universal filler

PUR-FÜLLER F 1338 (white)
PUR-FÜLLER F 1338-S (black)

MIXING RATIO
10:1 by volume with hardener H 132

DELIVERY BATCHES
5, 15 and 25 kg

ADDITIONALS
THINNER: V 2244 | V 1313
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + fast drying
- + very good machine sandability
- + good manual sandability
- + very good adhesion
- + good firmness on vertical surfaces


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
(in combination with JORA-COLOR JC 150 and GIESS-COLORLUX H 37X)
- + EN ISO 2409-GT 0 adhesive strength

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C ACRYPUR-BASE COAT H 23100

Solvent-based, transparent 2-component primer on a polyurethane base

MIXING RATIO
10:1 by volume with hardener H 132

DELIVERY BATCHES
10 litre

ADDITIONALS
Thinner: V 2244
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + easy handling
- + very good filling power
- + excellent sanding

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C JOCOPHEN-BASE COAT H 2010

Solvent-based 2-component primer as well as a sealing primer for ingredient-rich woods

DELIVERY BATCHES

2:1 by volume with hardener H 2242

LIEFERGRÖSSEN

5 litre

ADDITIONALS

Thinner: V 2244

Retarder: V 19

Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + easy to use
- + fast drying
- + excellent sandability when dry
- + Due to very good sealing properties against wood ingredients, the material is excellently suited for coating exotic woods

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C HIGH-SOLID-COLOR H 600X

Solvent-based 2-component coloured lacquer system with high filling power

GLOSS LEVELS

H 6000 matt

H 6007 special matt

MIXING RATIO

2:1 by volume with hardener H 6002

DELIVERY BATCHES

1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS

THINNER: V 2244

Retarder: V 19

Cleaning: V 2244 | V 803

PRODUCT PROPERTIES

- + very high solids content
- + ensures solvent, cost and time savings
- + metal marking resistant
- + solvent-resistant
- + high scratch and abrasion resistance
- + extremely fast drying

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in the Colormix color mixing program



2C COLORLUX-METALLIC H 378

Solvent-based 2-component lacquer with a decorative metal effect

MIXING RATIO
10:1 by volume with hardener H 132

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available as special adjustments

ADDITIONALS
Thinner: V 2244
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + lightfast
- + metal marking resistant
- + easy handling
- + excellent opacity


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Metallic shades for furniture surfaces can be self-mixed with JORA-COLOR JC 150



2C PUR-SCHICHTER H 136X

Solvent-based 2-component clear lacquer on a polyurethane base, usable as primer and topcoat

GLOSS LEVEL
H 1363 semi-matt, H 1365 matt
H 1366 deep matt, H 1367 special matt

MIXING RATIO
10:1 by volume with hardener H 1362

DELIVERY BATCHES
5 and 25 litre

ADDITIONALS
Thinner: V 2244
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + suitable as primer and top
- + excellent levelling properties
- + very good filling power
- + easy handling
- + achieves a highly resistant, abrasion-proof surface

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C JOCOPHEN-DD-LACK H 224X

Solvent-based 2-component clear lacquer / top coat with good filling power and fast drying

GLOSS LEVEL

H 2243 semi-matt, H 2245 matt
H 2246 deep matt

MIXING RATIO

2:1 by volume with hardener H 2242

DELIVERY BATCHES

5 litre

ADDITIONALS

Thinner: V 2244
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + very good chemical resistance
- + recommended use in case of very high demands regarding hardness, resistance to water, alcohol and solvents as well as PVC resistance
- + fast drying
- + good filling power

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C GIESS-COLORLUX H 37X

Solvent-based 2-component clear lacquer with excellent transparency and high light fastness

GLOSS LEVEL

H 371 glossy, H 373 semi-matt, H 375 matt, H 376 deep matt, H 376-S2 super matt, H 377 special matt

MIXING RATIO

10:1 by volume with hardener H 132

DELIVERY BATCHES

5 and 25 litre (H 371 only in 10 litre batches)

ADDITIONALS

Thinner: V V 2244
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + lightfast
- + for curtain coating and spraying
- + long pot life (2 – 3 days)
- + recommended for application as a top coat for JORA-COLOR JC 150


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C CLASSIC-EXTREME-RESIST CE 894-X

Solvent-based 2-component clear lacquer / top coat for interior workpieces exposed to high mechanical stresses

GLOSS LEVEL
CE 894-5 matt
CE 894-6 deep matt

MIXING RATIO
10:1 by volume with hardener H 132

DELIVERY BATCHES
5 and 25 litre

ADDITIONALS
Thinner: V 2244
Retarder: V 19
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + anti-fingerprint
- + extremely high resistance to mechanical stress
- + suitable for coating surfaces primed with HIGH-SOLID-BASE COAT H 4500
- + suitable for coating surfaces primed with JOCOPHEN BASE COAT H 2010
- + suitable for coating surfaces that have been coated with JORA-COLOR JC 150
- + fast drying
- + easy handling

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + PVC resistant

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C JORA-ULTRA-MATT-RESIST JF2492-1

NEW!

Solvent-based, ultra-matt 2-component clear lacquer / top coat with very good gloss stability

GLOSS LEVEL
natural matt

MIXING RATIO
100:15 by volume with hardener H 132 (JH2132-0)

DELIVERY BATCHES
5 and 25 litre

ADDITIONALS
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + ultra matt gloss level (similar to excimer technology)
- + excellent scratch resistance (anti-scratch)
- + anti-fingerprint
- + very pleasant touch
- + extremely good gloss stability
- + very high chemical resistance
- + suitable for coating surfaces primed with GIESS-COLORLUX H 376 and H 377
- + for light coloured surfaces

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance

SCOPE OF APPLICATION



TYPE OF APPLICATION





2C JORA-BRILLANT JB 875

Solvent-based 2-component high-gloss lacquer with brilliant transparency

GLOSS LEVEL
high gloss

MIXING RATIO
2:1 by volume with
BRILLIANT-HARDENER JH2870-0

DELIVERY BATCHES
5 and 25 litre

ADDITIONALS
Thinner: V 2083
Cleaning: V 2083 | V 2244 | V 803

PRODUCT PROPERTIES

- + transparent, brilliant high-gloss lacquer
- + excellent chemical and mechanical resistance
- + for transparent surfaces, can be used as a base and a top coat

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + free of formaldehyde

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C DECO-OIL DO 640C

NEW!

Decopaint-compliant, transparent oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 5, 10 and 30 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244
V 608 | V 2249


SCOPE OF APPLICATION

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C+2C DECO-OIL DO 660

VOC-FREE

VOC-free 1-component and 2-component oil, based on renewable raw materials

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with DECO-OIL-HARDENER DH 613

DELIVERY BATCHES
1, 3 and 25 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 2249 | V 608


PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + can be used with or without hardener
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 20
- + VOC-free
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.
A 2-component application is recommended for parquet and stairs.



1C DECO-OBJECT-OIL DO 670

Decopaint-compliant natural oil

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 803 | V 608


PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C DECO-NATURWACHS-OIL DO 680

Decopaint-compliant oil-wax combination

GLOSS LEVEL
semi-matt to matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 803 | V 608


PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

ANWENDUNG



AUFTRAGSART



Note: Consult a technical advisor for application information.



CLASSICSTAIN CS 731-833

Solvent-based stain for spraying and wiping

DELIVERY BATCHES
Basic shades 1, 3 and 10 litre
Card shades 1, 3 and 10 litre
Special shades 1, 3, 10 and 25 litre

ADDITIONALS
Cleaning: V 1415 | V 2244 | V 803

PRODUCT PROPERTIES

- + all shades can be mixed with each other
- + can be applied in a spraying process, with stain brush or sponge
- + a pore-emphasized stain appearance is generated with the brightener CS 700
- + can be used as a fast drying spraying stain with the brightener CS 800

AVAILABLE AS

- + CLASSICSTAIN CS 731 in 6 basic shades
- + CLASSICSTAIN CS 732 in 12 card shades
- + CLASSICSTAIN CS 733 for all special shades
- + CLASSICSTAIN CS 832 in 9 card shades
- + CLASSICSTAIN CS 833 for all special shades
- + available as starter set

SCOPE OF APPLICATION



TYPE OF APPLICATION





To protect parquet floors and stairs, we offer a wide range of products for heavily used surfaces. Dirt-, scratch- and abrasion-resistant - for the highest demands.

CHANGES START SMALL

Did you know that we have been generating electricity with our own photovoltaic system since 2010?

PCG – Beyond the surface

STEP BY STEP

PRODUCTS FOR PARQUET AND STAIRS



1C ECO-BASE EB 500
1C ECO-JOINT-FILL EF 510
1C ECO-FINISH EF 55X
1C ECO-HARTWACHS-FINISH EHF 570

38 – 45

1C AQUA-MAGIC-BASE JB7163-0001
1C+2C AQUASTEP AS 490

1C DECO-OIL-COLOR DO 630
1C DECO-OIL DO 640C
1C+2C DECO-OIL DO 660
1C DECO-OBJECT-OIL DO 670
1C DECO-NATURWACHS-OIL DO 680

HYDROSTAIN-MODULAR JC73X0-XXXX





1C ECO-BASE EB 500



Water-based, high-quality 1-component base coat for parquet floorings

DELIVERY BATCHES
5 litre

ADDITIONALS
Thinner: WATER
Cleaning: WATER


PRODUCT PROPERTIES

- + base coat for 1C ECO-FINISH 55X
- + effective reduction of the risk of joint bonding
- + practically odourless
- + easy handling
- + very good levelling properties
- + does not contain harmful substances
- + developed according to REACH

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + DIBt-approval
- + GISCODE: W2+
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C ECO-JOINT-FILL EF 510

Water-based joint filler with high solids content for fast filling of joints and cracks in wooden floorings

DELIVERY BATCHES
4 litre

ADDITIONALS
Cleaning: Water


PRODUCT PROPERTIES

- + extremely good filling properties
- + environmentally friendly
- + odourless
- + extremely fast drying
- + good sanding properties
- + for joints up to 3 mm wide (must be filled with wood dust)

STANDARDS AND TESTS

- + GISCODE: W2+

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C ECO-FINISH EF 55X

DIBt-approval

Water-based 1-component parquet lacquer for the surface treatment of parquet floors in living and public areas

GLOSS LEVEL
EF 553 semi-matt
EF 555 matt

DELIVERY BATCHES
5 litre

ADDITIONALS
Thinner: Water
Cleaning: Water


PRODUCT PROPERTIES

- + good abrasion and wear resistance
- + easy handling
- + very good levelling properties
- + resistant to common household chemicals
- + does not contain harmful substances
- + developed according to REACH

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + resistant to cream
- + EN ISO 2409-GT 0 adhesive strength
- + DIBt-approval
- + GISCODE: W2+
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



PARQUET & STAIRS



1C ECO-HARTWACHS-FINISH EHF 570

1-component wax oil for surface treatment of parquet floors and stair components in living areas

GLOSS LEVEL
matt

DELIVERY BATCHES
1 and 3 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 608

PRODUCT PROPERTIES

- + transparent
- + easy to use
- + extremely good penetration behaviour
- + very good water resistance
- + good accentuation of the wood surface
- + very good levelling properties


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C AQUA-MAGIC-BASE JB7163-0001

NEW!

Water-based 1-component insulating filler with excellent insulating effect and good sanding properties

DELIVERY BATCHES
7 and 15 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + excellent insulating effect with woods that are rich in resin content
- + good sandability
- + excellent filling properties
- + overcoatable with all our colour lacquer systems from JORDAN Lacke

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C+2C AQUASTEP AS 490

Transparent, water-based stair lacquer can be used as 1C and 2C lacquer

GLOSS LEVEL
matt (-5)
semi-matt (-3)

MIXING RATIO
10:1 nach Volumen mit AQUAHARDENER AH 410

DELIVERY BATCHES
10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + excellent light stability and good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + slip resistance class R10 in combination with AQUA PRO-GRIP APG 402
- + resistance to cream
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C DECO-OIL-COLOR DO 630

NEW!

Decopaint-compliant, coloured oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
0,25, 1 und 5 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244
V 608 | V 2249


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades
- + colour shades can be mixed with each other


STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



PARQUET &
STAIRS



1C DECO-OIL DO 640C

NEW!

Decopaint-compliant, transparent oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 5, 10 and 30 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244
V 608 | V 2249


SCOPE OF APPLICATION

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C+2C DECO-OIL DO 660

VOC-FREE

VOC-free 1-component and 2-component oil, based on renewable raw materials

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with DECO-OIL-HARDENER DH 613

DELIVERY BATCHES
1, 3 and 25 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 2249 | V 608


PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + can be used with or without hardener
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 20
- + VOC-free
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.
A 2-component application is recommended for parquet and stairs.



1C DECO-OBJECT-OIL DO 670

Decopaint-compliant natural oil

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 803 | V 608


PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C DECO-NATURWACHS-OIL DO 680

Decopaint-compliant oil-wax combination

GLOSS LEVEL
semi-matt to matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 803 | V 608


PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION

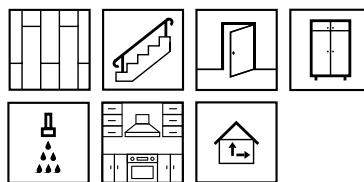

TYPE OF APPLICATION



Note: Consult a technical advisor for application information.

PARQUET &
STAIRS



HYDROSTAIN-MODULAR JC73X0-XXXX

NEW!

Modular water-based stain system that combines various staining effects

DELIVERY BATCHES
Base components: 1, 5 and 25 litre
Dye solutions: 1 and 5 litre
Pigment solutions: 1 and 5 litre
Special shades: 1, 5 and 25 litre

ADDITIONALS
Cleaning: Water

With the HYDROSTAIN-MODULAR-DIVERSE JC7350-XXXX, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lichtecht in Kombination mit Pigmentlösung
- + brilliant shades in combination with dye solution

BASE COMPONENTS AVAILABLE AS:

HYDROSTAIN-MODULAR-STANDARD JC7320-XXXX (STAIN FOR SPRAYING WITHOUT WIPING)

- + easy to use
- + universally applicable
- + dye and pigment solutions can be combined


HYDROSTAIN-MODULAR-POSITIVE JC7330-XXXX (STAIN FOR SPRAYING WITHOUT WIPING)

- + achieves an excellent, positive stain pattern
- + most suitable for use on softwoods
- + achieves brilliant colour results in combination with dye solutions


HYDROSTAIN-MODULAR-RUSTIC JC7340-XXXX (RUSTIC STAIN FOR SPRAYING AND WIPING)

- + intensive pore structure
- + ideal for use on porous woods
- + dye and pigment solutions can be combined

SCOPE OF APPLICATION



TYPE OF APPLICATION





SIMPLY INVITING

SURFACE DIVERSITY FOR DOORS


Water-based lacquers and oils for interior doors, door panels and frames. Our portfolio offers opaque, glazing and clear lacquers as well as oiled surfaces.

1C AQUA-MAGIC-BASE JB7163-0001
1C AQUA-MAGIC-FILLER JB7430-0X01
1C AQUA-MAGIC-COLOR JK7462-XXXX
1C AQUA-MAGIC-CLEAR JM7475-X
1C AQUA-MAGIC-CLEAR JM7477-X
1C AQUA-OIL-EFFECT JF7455-1
1C+2C AQUASTEP AS 490
2C AQUA-NATUREFFEKT AN 420

1C DECO-OIL-COLOR DO 630
1C DECO-OIL DO 640C
1C+2C DECO-OIL DO 660
1C DECO-OBJECT-OIL DO 670
1C DECO-NATURWACHS-OIL DO 680

HYDROSTAIN-MODULAR JC73X0-XXXX

46 – 55





1C AQUA-MAGIC-BASE JB7163-0001

NEW!

Water-based 1-component insulating filler with excellent insulating effect and good sanding properties

DELIVERY BATCHES
7 and 15 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + excellent insulating effect with woods that are rich in resin content
- + good sandability
- + excellent filling properties
- + overcoatable with all our colour lacquer systems from JORDAN Lacke

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-MAGIC-FILLER JB7430-0X01

Water-based 1-component universal filler with excellent filling power and good sandability

JB7430-0001 (white)
JB7430-0901 (black)

DELIVERY BATCHES
7 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + overcoatable with all our colour lacquer systems from JORDAN Lacke
- + excellently sandable
- + excellent filling power
- + perfect adhesion
- + excellent firmness on vertical surfaces

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462-XXXX)
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C AQUA-MAGIC-COLOR JK7462-XXXX

Water-based 1-component coloured lacquer harmonising quality demand and environmental awareness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUKTEIGENSCHAFTEN

- + very high light stability
- + very high opacity
- + very good sanding marks coverage
- + high abrasion and scratch resistance
- + ausgezeichneter Verlauf
- + einfache Handhabung

NORMEN UND PRÜFUNGEN

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in the Colormix color mixing program



1C AQUA-MAGIC-CLEAR JM7475-X

Water-based 1-component clear lacquer with high scratch and abrasion resistance

GLOSS LEVEL
JM7475-2 (deep matt)
JM7475-3 (matt)
JM7475-4 (semi-matt)

DELIVERY BATCHES
10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + very high light stability
- + excellent transparency
- + high abrasion and scratch resistance
- + very good accentuation of the grain
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C MAGIC-CLEAR JM7477-X

Water-based 1-component clear lacquer for coating off porous woods

GLOSS LEVEL
JM7477-2 (deep matt)
JM7477-3 (matt)
JM7477-4 (semi-matt)

DELIVERY BATCHES
10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + modified variant of JM7475-X especially for porous woods
- + very high light stability
- + particularly high transparency
- + very good accentuation of the grain
- + easy to use


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-OIL-EFFECT JF7455-1

NEW!

Transparent, water-based 1-component natural effect lacquer with high resistance

GLOSS LEVEL
natural matt

DELIVERY BATCHES
5,10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + pleasant touch
- + high light stability
- + high resistance
- + excellent transparency
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C+2C AQUASTEP AS 490

Transparent, water-based stair lacquer can be used as 1C and 2C lacquer

GLOSS LEVEL

matt (-5)
semi-matt (-3)

MIXING RATIO

10:1 nach Volumen mit AQUAHARDENER AH 410

DELIVERY BATCHES

10 and 25 kg

ADDITIONALS

Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + excellent light stability and good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + slip resistance class R10 in combination with AQUA PRO-GRIP APG 402
- + resistance to cream
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



2C AQUA-NATUREFFEKT AN 420

Water-based 2-component natural effect lacquer with high resistance

GLOSS LEVEL

natural matt

MIXING RATIO

10:1 by volume with AQUAHARDENER AH 410

DELIVERY BATCHES

5 and 25 kg

ADDITIONALS

Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + high resistance
- + very good chemical and mechanical resistance
- + dries to a raw wood-like natural matt finish
- + pleasant touch

STANDARDS AND TESTS

- + following DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C DECO-OIL-COLOR DO 630

NEW!

Decopaint-compliant, coloured oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
0,25, 1 und 5 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244
V 608 | V 2249


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades
- + colour shades can be mixed with each other


STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C DECO-OIL DO 640C

NEW!

Decopaint-compliant, transparent oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 5, 10 and 30 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244
V 608 | V 2249


SCOPE OF APPLICATION

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C+2C DECO-OIL DO 660

VOC-FREE

VOC-free 1-component and 2-component oil, based on renewable raw materials

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with DECO-OIL-HARDENER DH 613

DELIVERY BATCHES
1, 3 and 25 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 2249 | V 608


PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + can be used with or without hardener
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 20
- + VOC-free
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.
A 2-component application is recommended for parquet and stairs.



1C DECO-OBJECT-OIL DO 670

Decopaint-compliant natural oil

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 803 | V 608


PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C DECO-NATURWACHS-OIL DO 680

Decopaint-compliant oil-wax combination

GLOSS LEVEL
semi-matt to matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 803 | V 608


PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

ANWENDUNG



AUFTRAGSART



Note: Consult a technical advisor for application information.



HYDROSTAIN-MODULAR JC73X0-XXXX

NEW!

Modular water-based stain system that combines various staining effects

DELIVERY BATCHES

Base components: 1, 5 and 25 litre

Dye solutions: 1 and 5 litre

Pigment solutions: 1 and 5 litre

Special shades: 1, 5 and 25 litre

ADDITIONALS

Cleaning: Water

With the HYDROSTAIN-MODULAR-DIVERSE JC7350-XXXX, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lichtecht in Kombination mit Pigmentlösung
- + brilliant shades in combination with dye solution

BASE COMPONENTS AVAILABLE AS:

HYDROSTAIN-MODULAR-STANDARD JC7320-XXXX (STAIN FOR SPRAYING WITHOUT WIPING)

- + easy to use
- + universally applicable
- + dye and pigment solutions can be combined


HYDROSTAIN-MODULAR-POSITIVE JC7330-XXXX (STAIN FOR SPRAYING WITHOUT WIPING)

- + achieves an excellent, positive stain pattern
- + most suitable for use on softwoods
- + achieves brilliant colour results in combination with dye solutions


HYDROSTAIN-MODULAR-RUSTIC JC7340-XXXX (RUSTIC STAIN FOR SPRAYING AND WIPING)

- + intensive pore structure
- + ideal for use on porous woods
- + dye and pigment solutions can be combined

SCOPE OF APPLICATION



TYPE OF APPLICATION






FOR LEFT, RIGHT AND ABOVE

PRODUCTS FOR INTERIOR FITTINGS

For a healthy indoor climate - with our decopaint-compliant water-based lacquers, oils and stains for coating wooden ceilings, wall panelling, etc. Choose from a wide range of products.



1C AQUA-MAGIC-BASE JB7163-0001
1C AQUA-MAGIC-FILLER JB7430-0X01
1C AQUA-MAGIC-COLOR JK7462-XXXX
1C AQUA-MAGIC-CLEAR JM7475-X
1C AQUA-MAGIC-CLEAR JM7477-X
1C AQUA-OIL-EFFECT JF7455-1
1C AQUA SUN-PROTECT JM7480-1
1C+2C AQUASTEP AS 490
2C AQUA-NATUREFFEKT AN 420

56 – 65

1C DECO-OIL-COLOR DO 630
1C DECO-OIL DO 640C
1C+2C DECO-OIL DO 660
1C DECO-OBJECT-OIL DO 670
1C DECO-NATURWACHS-OIL DO 680

HYDROSTAIN-MODULAR JC73X0-XXXX



1C AQUA-MAGIC-BASE JB7163-0001

NEW!

Water-based 1-component insulating filler with excellent insulating effect and good sanding properties

DELIVERY BATCHES
7 and 15 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + excellent insulating effect with woods that are rich in resin content
- + good sandability
- + excellent filling properties
- + overcoatable with all our colour lacquer systems from JORDAN Lacke

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-MAGIC-FILLER JB7430-0X01

Water-based 1-component universal filler with excellent filling power and good sandability

JB7430-0001 (white)
JB7430-0901 (black)

DELIVERY BATCHES
7 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + overcoatable with all our colour lacquer systems from JORDAN Lacke
- + excellently sandable
- + excellent filling power
- + perfect adhesion
- + excellent firmness on vertical surfaces

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR JK7462-XXXX)
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C AQUA-MAGIC-COLOR JK7462-XXXX

Water-based 1-component coloured lacquer harmonising quality demand and environmental awareness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

ADDITIONALS
Thinner: Water
Cleaning: Water I AC 460


PRODUKTEIGENSCHAFTEN

- + very high light stability
- + very high opacity
- + very good sanding marks coverage
- + high abrasion and scratch resistance
- + ausgezeichneter Verlauf
- + einfache Handhabung

NORMEN UND PRÜFUNGEN

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Recipes available in the Colormix color mixing program



1C AQUA-MAGIC-CLEAR JM7475-X

Water-based 1-component clear lacquer with high scratch and abrasion resistance

GLOSS LEVEL
JM7475-2 (deep matt)
JM7475-3 (matt)
JM7475-4 (semi-matt)

DELIVERY BATCHES
10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water I AC 460


PRODUCT PROPERTIES

- + very high light stability
- + excellent transparency
- + high abrasion and scratch resistance
- + very good accentuation of the grain
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C MAGIC-CLEAR JM7477-X

Water-based 1-component clear lacquer for coating off porous woods

GLOSS LEVEL
JM7477-2 (deep matt)
JM7477-3 (matt)
JM7477-4 (semi-matt)

DELIVERY BATCHES
10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + modified variant of JM7475-X especially for porous woods
- + very high light stability
- + particularly high transparency
- + very good accentuation of the grain
- + easy to use


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C AQUA-OIL-EFFECT JF7455-1

NEW!

Transparent, water-based 1-component natural effect lacquer with high resistance

GLOSS LEVEL
natural matt

DELIVERY BATCHES
5, 10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + pleasant touch
- + high light stability
- + high resistance
- + excellent transparency
- + easy to use

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





1C AQUA-SUN-PROTECT JM7480-1

Water-based 1-component lacquer with excellent light stability

GLOSS LEVEL
natural matt

Delivery batches
5, 10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460

PRODUCT PROPERTIES

- + very good UV-protection
- + protects the wood against the natural yellowing process
- + very pleasant touch
- + easy handling
- + fast drying


STANDARDS AND TESTS

- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C+2C AQUASTEP AS 490

Transparent, water-based stair lacquer can be used as 1C and 2C lacquer

GLOSS LEVEL
matt (-5)
semi-matt (-3)

MIXING RATIO
10:1 nach Volumen mit AQUAHARDENER AH 410

DELIVERY BATCHES
10 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + excellent light stability and good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + slip resistance class R10 in combination with AQUA PRO-GRIP APG 402
- + resistance to cream
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION





2K AQUA-NATUREFFEKT AN 420

Water-based 2-component natural effect lacquer with high resistance

GLOSS LEVEL
natural matt

MIXING RATIO
10:1 by volume with AQUAHARDENER AH 410

DELIVERY BATCHES
5 and 25 kg

ADDITIONALS
Thinner: Water
Cleaning: Water | AC 460


PRODUCT PROPERTIES

- + high resistance
- + very good chemical and mechanical resistance
- + dries to a raw wood-like natural matt finish
- + pleasant touch

STANDARDS AND TESTS

- + following DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



1C DECO-OIL-COLOR DO 630

NEW!

Decopaint-compliant, coloured oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
0,25, 1 und 5 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244
V 608 | V 2249


PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades
- + colour shades can be mixed with each other


STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

ANWENDUNG



AUFTRAGSART



Note: Consult a technical advisor for application information.



1C DECO-OIL DO 640C

NEW!

Decopaint-compliant, transparent oil with high hardness

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 5, 10 and 30 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244
V 608 | V 2249


SCOPE OF APPLICATION

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C+2C DECO-OIL DO 660

VOC-FREE

VOC-free 1-component and 2-component oil, based on renewable raw materials

GLOSS LEVEL
matt

MIXING RATIO
10:1 by volume with DECO-OIL-HARDENER DH 613

DELIVERY BATCHES
1, 3 and 25 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 2249 | V 608


PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + can be used with or without hardener
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 20
- + VOC-free
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.

A 2-component application is recommended for parquet and stairs.



1C DECO-OBJECT-OIL DO 670

Decopaint-compliant natural oil

GLOSS LEVEL
matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 803 | V 608


PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade

STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

SCOPE OF APPLICATION



TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



1C DECO-NATURWACHS-OIL DO 680

Decopaint-compliant oil-wax combination

GLOSS LEVEL
semi-matt to matt

DELIVERY BATCHES
1, 3 and 10 litre

ADDITIONALS
Thinner: V 608
Cleaning: V 1415 | V 2244 | V 803 | V 608


PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

ANWENDUNG



AUFTRAGSART



Note: Consult a technical advisor for application information.



HYDROSTAIN-MODULAR JC73X0-XXXX

NEW!

Modular water-based stain system that combines various staining effects

DELIVERY BATCHES

Base components: 1, 5 and 25 litre

Dye solutions: 1 and 5 litre

Pigment solutions: 1 and 5 litre

Special shades: 1, 5 and 25 litre

ADDITIONALS

Cleaning: Water

With the HYDROSTAIN-MODULAR-DIVERSE JC7350-XXXX, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lichtecht in Kombination mit Pigmentlösung
- + brilliant shades in combination with dye solution

BASE COMPONENTS AVAILABLE AS:

HYDROSTAIN-MODULAR-STANDARD JC7320-XXXX (STAIN FOR SPRAYING WITHOUT WIPING)

- + easy to use
- + universally applicable
- + dye and pigment solutions can be combined


HYDROSTAIN-MODULAR-POSITIVE JC7330-XXXX (STAIN FOR SPRAYING WITHOUT WIPING)

- + achieves an excellent, positive stain pattern
- + most suitable for use on softwoods
- + achieves brilliant colour results in combination with dye solutions


HYDROSTAIN-MODULAR-RUSTIC JC7340-XXXX (RUSTIC STAIN FOR SPRAYING AND WIPING)

- + intensive pore structure
- + ideal for use on porous woods
- + dye and pigment solutions can be combined

SCOPE OF APPLICATION



TYPE OF APPLICATION





The eco-Institute is one of the most experienced German laboratories for indoor air analysis and has been committed to healthy indoor air for more than 30 years. The tests set the highest requirements for the most common indoor pollutants and only tolerate significantly lower emission limits than many other standards.


The experts of the eco-Institute confirm that our Natureline products not only protect your wood outdoors, but also ensure healthy indoor air. All Natureline products can be used safely in areas where allergy sufferers, people with health problems, small children and animals are present.



SENTINEL HAUS INSTITUT


The Sentinel Haus Institute (SHI) describes itself as a knowledge and market leader on the subject of healthy living and has set itself the goal of making healthier buildings the norm. On its website www.sentinel-haus.de you will find information on emission-tested products, trained specialists, certified practical examples, and thematic worlds all about healthier building and renovation. Thanks to its many convincing features, our NATURELINE product line is listed on the portal.





JORDAN NATURE-PUR 200
JORDAN NATURE FIRE-PROTECT 210
JORDAN NATURE-COLOR 203
JORDAN NATURE-PUR PLUS PRO 202

66 – 69



Our wood preservatives for outdoor use provide optimum protection for your wooden surfaces in all weathers. We pay attention not only to wood protection but also to the environment. All our products for outdoor use are therefore free of toxins and other harmful ingredients. With us, you can protect your surfaces sustainably - environmentally and health-friendly for humans and animals.

Certified by the eco-Institute and recommended by the Sentinel Haus Institute. It doesn't get any greener than this!

IN ALL WEATHERS
PRODUCTS FOR OUTDOOR USE



JORDAN NATURE-PUR 200



Biocide-free wood preservative for indoor and outdoor use

DELIVERY BATCHES
1, 5 and 25 kg

ADDITIONALS
Cleaning: Water



PRODUCT PROPERTIES

- + purely mineral, solvent- and emission-free¹
- + QNG-Ready
- + without pesticides, insecticides and biocides¹
- + free of extractable heavy metals (acc. EN 71, part 3)
- + leaves no harmful substances in nature¹
- + impregnated wood can have contact with the ground without concern
- + vegan
- + suitable for bats, approved for roosts of endangered species²
- + harmless for bees, after drying, insects are not harmed by contact with the treated wood¹
- + climate resistant, protects against harmful environmental influences including weathering³
- + eliminates the breeding ground of wood-destroying fungi and mould (acc. EN 113)⁴
- + protects against animal wood pests such as termites, house longhorn beetles, powderpost beetles, furniture beetles, woodworm, etc.⁵
- + prevents the spread of wood pests after infestation⁵
- + act as a flame-retardant, the spread of fire and the development of smoke are permanently inhibited⁶


LISTED AT:

- + Sentinel Haus Institute – the institute for healthy buildings
- + European Society for Healthy Building and Indoor Hygiene (EGGBI)
- + Swiss Coordination Office for Bat Protection

SCOPE OF APPLICATION



TYPE OF APPLICATION



JORDAN NATURE FIRE-PROTECT 210

NEW!

Flame-retardant, biocide-free wood preservative

DELIVERY BATCHES
1, 5 and 25 kg

ADDITIONALS
Cleaning: Water


ADDITIONAL PRODUCT PROPERTIES

- + purely mineral, solvent- and biocide-free flame retardant
- + no harmful substances
- + low flammability and low smoke emission
- + increases the fire resistance of untreated wooden components
- + achieves fire protection class EN 13501-1 C-s1, d0 (flame retardant) in application with CLT cross laminated timber made of spruce⁷

SCOPE OF APPLICATION



TYPE OF APPLICATION



JORDAN NATURE-COLOR 203



ADDITIONAL PRODUCT PROPERTIES

- + colours based on mineral pigments
- + used for individual colour design
- + card shades can be mixed with each other
- + non-washable and colourfast
- + colours are free from extractable heavy metals (acc. EN 71, part 3)

Biocide-free, coloured wood preservative for indoor and outdoor use

DELIVERY BATCHES

1, 5 and 25 kg


ADDITIONALS

Cleaning: Water

SCOPE OF APPLICATION



TYPE OF APPLICATION



Also available as a starter set.

JORDAN NATURE-PUR PLUS PRO 202



ADDITIONAL PRODUCT PROPERTIES

- + additive to dye or lessen the JORDAN NATURE-COLOR 203 card shades
- + EN 71, part 3, free of extractable heavy metals

Transparent base material for JORDAN NATURE-COLOR

DELIVERY BATCHES

1, 5 and 25 kg

ADDITIONALS

Cleaning: Water




TESTED BY:

1. ECO Institute (certification no. ID 1016-33690-002)
2. Swiss Coordination Office for Bat Protection
3. EPH, Entwicklungs- und Prüflabor Holztechnologie GmbH (Nr. 2715644)
4. Department for Forest Products, Faculty of Forest Sciences of the Swedish University of Agricultural Sciences (Nr. Nr. 2011-113/84)
5. Forest Products Department, Mississippi State University
6. SP Technical Research Institute of Sweden
7. MPA Dresden GmbH

OUTDOOR



**WELL
BEAU
CARE A**



Whether by hand or machine: With our cleaning and care products, you can maintain surfaces and ensure a long-lasting value preservation of furniture and floors.

**WELL-CARED AND
BEAUTIFUL IN AN INSTANT**
AND CLEANING PRODUCTS

JORA-CLEAN BASIC CLEANER JCG 920
JORA-CARE MAINTENANCE AGENT JCW 930
JORA-CARE WAX POLISH JCW 940
JORA-CARE MAINTENANCE OIL JCP 950
JORA-CARE MAINTENANCE OIL JCP 955

JORA-CLEAN KUNSTSTOFFREINIGER JCK 960

70 – 75



JORA-CLEAN BASIC CLEANER JCG 920

PRODUCT PROPERTIES

- + cleaning agent for very dirty surfaces (such as floors)
- + suitable for removing old layers of water-based care products
- + suitable for removing stubborn dirt on sealed parquet

Highly effective cleaning agent for surfaces that are very susceptible to soiling

DELIVERY BATCHES
200 ml and 1 litre

SCOPE OF APPLICATION



TYPE OF APPLICATION



JORA-CARE MAINTENANCE AGENT JCW 930

PRODUCT PROPERTIES

- + cares on the base of natural jojoba oil
- + suitable for regular maintenance care of oiled surfaces
- + especially suitable for the care of furniture and lightly stressed parquet floors
- + cleans with the power of oranges

Natural care product suitable for regular application

DELIVERY BATCHES
200 ml and 1 litre

SCOPE OF APPLICATION



TYPE OF APPLICATION





JORA-CARE WAX POLISH JCW 940

Wax polish with protecting properties for sealed surfaces

DELIVERY BATCHES
200 ml and 1 litre

PRODUCT PROPERTIES

- + easy to use
- + liquid wax mixture
- + highly economical, 1 litre is sufficient for approx. 200m²
- + suitable for the care of sealed parquet floors
- + especially suitable for the initial care of parquet floors
- + ensures efficient edge protection
- + ensures a thin protective film on the surface

SCOPE OF APPLICATION



AUFTRAGSART



JORA-CARE MAINTENANCE OIL JCP 950

Versatile care oil with short drying time for oiled surfaces

DELIVERY BATCHES
200 ml and 1 litre

PRODUCT PROPERTIES

- + suitable for the initial and maintenance care of oiled surfaces
- + short drying time
- + suitable for regular freshening up of oiled surfaces

SCOPE OF APPLICATION



TYPE OF APPLICATION





JORA-CARE MAINTENANCE OIL JCP 955

Versatile, water-based care oil with short drying time for oiled surfaces

DELIVERY BATCHES
200 ml and 1 litre

PRODUCT PROPERTIES

- + suitable for the initial and maintenance care of oiled surfaces
- + short drying time
- + contains natural carnauba wax
- + free of VOC and cobalt-free
- + suitable for regular freshening up of oiled surfaces

SCOPE OF APPLICATION



TYPE OF APPLICATION



JORA-CLEAN KUNSTSTOFFREINIGER JCK 960

Plastic cleaner for cleaning of plastic surfaces and edges

DELIVERY BATCHES
200 ml, 1, 2,5 and 25 litre

PRODUCT PROPERTIES

- + for the efficient removal of adhesive residues, glue residues, traces of adhesive tape as well as ballpoint pen, pencil and felt-tipped pen lines
- + also suitable for detaching old stickers
- + can be used for nearly all plastic surfaces such as ABS, melamine, PE, PP or PVC
- + suitable for degreasing of surfaces
- + gentle, streak free cleaning

SCOPE OF APPLICATION




TYPE OF APPLICATION





JORDAN NATURELINE

THE GREEN PROTECTION FOR WOOD AND ENVIRONMENT

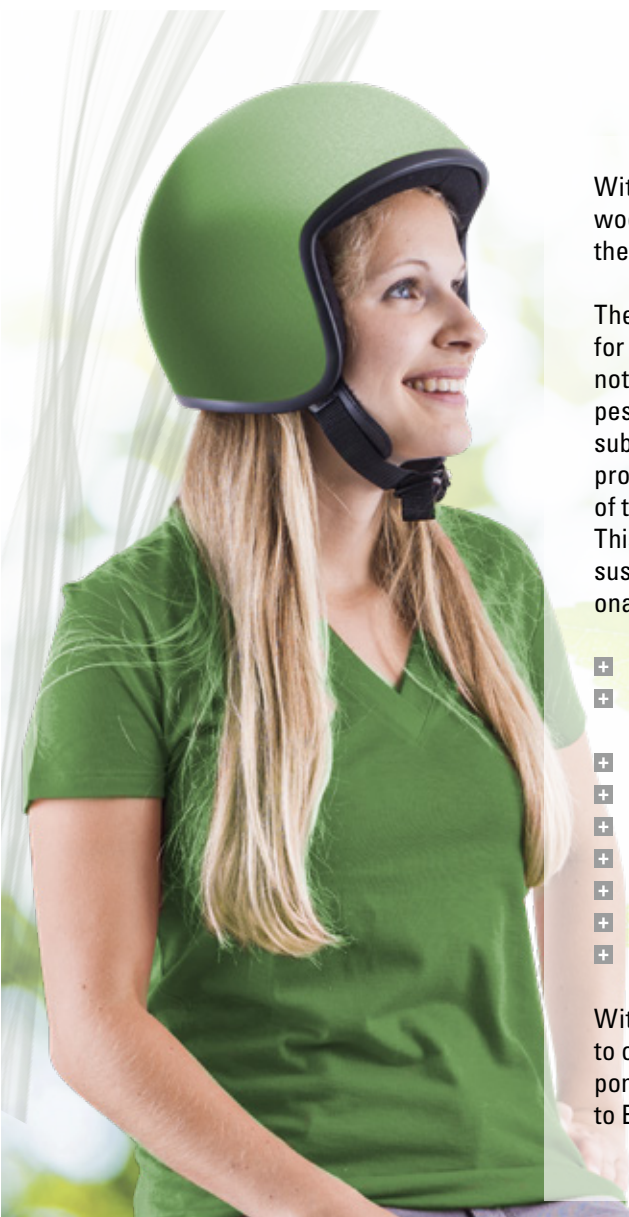

With the JORDAN Natureline, JORDAN Lacke is bringing a highly sustainable wood preservative to the market that not only protects your wood, but also the environment.

The ready-to-use coloured and colourless mineral wood preservative is ideally suited for indoor and outdoor use. JORDAN NATURE-PUR and JORDAN NATURE-COLOR not only provide effective protection against fungi (according to EN 113) and animal pests without biocides, but also improve the flame-retardant properties of the wood substrate. Due to the particularly low-emission formulation, on a mineral basis, the products of the JORDAN Natureline meet the strict requirements for the certification of the eco-INSTITUT label.

This is a recognised quality label that confirms the product's pollution prevention and sustainability, and its emission requirements cover the following national & international assessment programmes, including:

- + AgBB Scheme Germany
- + State building regulations / MVV TB Germany: Requirements for structural installations with regard to health protection (ABG)
- + DGNB International (Level 4)
- + QNG-Ready
- + BREEAM
- + WELL International und LEED v4
- + eco-bau Switzerland
- + Belgian VOC Regulation
- + French VOC Regulation A+

With JORDAN NATURE-FIRE-PROTECT 210, JORDAN Lacke has recently also started to offer a biocide and solvent-free fire protection coating with which solid wood components can be coated in order to achieve a classification of fire behaviour according to EN 13501-1 C-s1-d0.



ADDITIVE TO INCREASE THE SLIP RESISTANCE

- AQUA PRO-GRIP APG 402

THINNER AND MACHINE CLEANING

- SPECIAL THINNER V 1313
- NITRO-THINNER V 1415
- DD-THINNER V 2244
- THINNER HG V 2083
- DECO-OIL-THINNER V 608
- UNI-WASHING SOLVENT V 803
- WATERLACQUER-CLEANER AC 460

RETARDER

- RETARDER V19

COLOUR CONCENTRATES

- PIGMENT CONCENTRATE Y
- CLASSIC-COLOR-CONCENTRATE CCC 1000 – 1009

ADDITIVE TO INCREASE THE METAL MARKING RESISTANCE

- CLASSIC-METALMARKING-CONCENTRATE CR 802

ADDITIVE TO INCREASE THE LIGHT RESISTANCE

- LIGHT GUARD CONCENTRATE LK 45

ADDITIVE TO IMPROVE THE ADHESION PROPERTIES

- GLAS HARDENER GH 135
- AQUA-CROSSLINKER JH8413-0

ADDITIVE TO IMPROVE THE FLOW PROPERTIES

- AQUA-PRO-FLOW JA7403-0

NEW!

EFFECT PASTES

- ANTIQUE PASTE P 57-0 white
- ANTIQUE PASTE P 57-1 yellow
- ANTIQUE PASTE P 57-3 red
- ANTIQUE PASTE P 57-5 blue
- ANTIQUE PASTE P 57-6 green
- ANTIQUE PASTE P 57-9 black
- LIME-OAK PASTE P 1669
- DECOMATTPASTE DM 621
- DECOMATTPASTE DM 622
- DECOSTRUCTURE DS 604 (coarse)
- DECOSTRUCTURE DS 605 (fine)
- PRO-STRUCTURE JA9048-0-01










































THIS AND THAT
PROFESSIONAL ADDITIVES
FOR PERFECT SURFACES




Our wide range of additional products offers further possibilities for surface coating with effect pastes, colour concentrates and additives.

ADDITIVE TO INCREASE THE SLIP RESISTANCE
THINNER AND MACHINE CLEANING
RETARDER
COLOUR CONCENTRATES
ADDITIVE TO INCREASE THE METAL MARKING RESISTANCE
ADDITIVE TO INCREASE THE LIGHT RESISTANCE
ADDITIVE TO IMPROVE THE ADHESION PROPERTIES
ADDITIVE TO IMPROVE THE FLOW PROPERTIES
EFFECT PASTES

76–77


	SCOPE OF APPLICATION	PRODUCT	1C/2C	PRODUCT LINE	TYPE OF APPLICATION	BENEFITS
FILLER		AQUA-MAGIC-FILLER JB7430-0X01	1C	AQUALINE		excellent filling power and excellent firmness on vertical surfaces
		PUR-FILLER F 1338	2C	CLASSICLINE		pigmented filler with good sealing effect
		ECO-JOINT-FILL EF 510	1C	PARQUETLINE		quick filling of joints and cracks in wooden floors
PRIMER / BASE COATS		AQUA-MAGIC-BASE JB7163-0001	1C	AQUALINE		well sandable and excellent filling power
		CLASSICBASE CBM 820	1C	CLASSICLINE		excellent adhesion properties on various metals
		CLASSICBASE CB 823	1C	CLASSICLINE		excellent adhesion properties on glass
		JOCOPHEN-BASE COAT H 2010	2C	CLASSICLINE		very good sealing effect, even with ingredient-rich woods
		HIGH-SOLID-BASE COAT H 4500	2C	CLASSICLINE		high solid content, ideal as a base coat for buffable high gloss surfaces
		ACRYPUR-BASE COAT H 23100	2C	CLASSICLINE		transparent base coat with very high filling power
		ECO-BASE EB 500	1C	PARQUETLINE	 	low odour and free of harmful substances, reduces the risk of joint adhesion
		AQUA MAGIC-COLOR AMC 462	1C	AQUALINE		light-stable and environmentally friendly colour lacquer system
COLOURED LACQUERS		JORA-COLOR JC 150	2C	CLASSICLINE		lightfast colour lacquer system, suitable for the coating of children's toys
		HIGH-SOLID-COLOR H 600X	2C	CLASSICLINE		extremely fast drying, makes it possible to save costs and time
		JORA-BRILLANT-COLOR JBC 855	2C	CLASSICLINE		brilliant, high-gloss surfaces with very high mechanical resistance
		COLORLUX-METALLIC H 378	2C	CLASSICLINE	 	metallic lacquer system for special adjustments
		JORDAN NATURE-COLOR 203	1C	NATURELINE	  	environmentally friendly, biocide- and pesticide-free colour system
		PUR-SCHICHTER H 136X	2C	CLASSICLINE		multi-layer lacquer with very high mechanical resistance
MULTI-LAYER LACQUERS		TEMPOFIX-SCHICHTER SG 17-X	1C	CLASSICLINE	 	fast-drying multi-layer lacquer, very easy processing
		HIGH-SOLID-SCHICHTER H 400X	2C	CLASSICLINE		high solid lacquer, very high filling power and fast drying
		COSMOLIT-SCHICHTER HS 200X	1C	CLASSICLINE	 	easy handling, particularly high mechanical resistance

GLOSS LEVEL	HARDENER	DIN 4102-B1 low flammability or similar	EN 71, part 3 free of extractable heavy metals	DIN 53160 resistance to saliva and perspiration	DIN 68861-1B chemical resistance	Others	Page
		yes	yes				10, 48, 56
	10:1 by volume with hardener H 132	yes	yes				14, 30
						GISCODE: W2+	40
			yes				10, 42, 48, 58
							16
							16
	2:1 by volume with hardener H 2242		yes				15, 31
	2:1 by volume with hardener H 4002	yes					15
	10:1 by volume with hardener H 132		yes				14, 30
			yes			DIBt-approval GISCODE: W2+	40
matt		yes	under examination	yes			11, 49, 59
matt	10:1 by volume with hardener H 132	yes	yes	yes	1B	Suitability for children's toys	18
matt (H 6000) special matt (H 6007)	2:1 by volume with hardener H 6002	yes	yes	yes	1B		17, 31
high gloss	2:1 by volume with BRILLIANT-HARDENER JH2870-0	yes	yes	yes	1B		17
matt	10:1 by volume with hardener H 132		yes	yes	1B		18, 32
matt							69
semi-matt (H 1363) matt (H 1365) deep matt (H 1366) special matt (H 1367)	10:1 by volume with hardener H 1362		yes	yes	1B		20, 32
semi-matt (SG 17-3) matt (SG 17-5) deep matt (SG 17-6)			yes	yes			19
glossy (H 4001) semi-matt (H 4004) matt (H 4005) special matt (H 4007)	2:1 by volume with hardener H 4002		yes	yes	1B		20
semi-matt (HS 2003) matt (HS 2005) deep matt (HS 2006)			yes	yes	1B		19

CLEAR LACQUERS

SCOPE OF APPLICATION	PRODUCT	1C/2C	PRODUCT LINE	TYPE OF APPLICATION	BENEFITS
	AQUA-MAGIC-CLEAR JM7475-X	1C	AQUALINE		water-based clear lacquer with high scratch and abrasion resistance
	AQUA-MAGIC-CLEAR JM7477-X	1C	AQUALINE		elegant appearance for porous woods
	AQUASTEP AS 490	1C+2C	AQUALINE		very high light stability and high mechanical resistance
	AQUA-NATUREFFEKT AN 420	2C	AQUALINE		natural raw wood-like surface with good resistance
	AQUA-OIL-EFFECT JF7455-1	1C	AQUALINE		excellent transparency and high light stability
	AQUA SUN-PROTECT JM7480-1	1C	AQUALINE		excellent light stability for protection against yellowing
	JORA-BRILLANT JB 875	2C	CLASSICLINE		brilliant, high-gloss surfaces with very high mechanical resistance
	JORA-ULTRA-MATT-RESIST JF2492-1	2C	CLASSICLINE		ultra matt surface with extremely high gloss stability, anti-fingerprint effect
	CLASSIC-EXTREME-RESIST CE 894-X	2C	CLASSICLINE		extremely high mechanical and chemical resistance, anti-fingerprint effect
	GIESS-COLORLUX H 37X	2C	CLASSICLINE		lightfast topcoat for curtain coating and spraying
	JOCOPHEN-DD-LACQUER H 224X	2C	CLASSICLINE		high filling power and fast drying
	JOCOPAN-ROHHOLZEFFEKTLACK H 1861	2C	CLASSICLINE		fast drying, resistant natural effect lacquer
	JORDAN NATURE FIRE-PROTECT 210	1C	NATURELINE		increases the flame retardant properties of wood substrates
	JORDAN NATURE-PUR 200	1C	NATURELINE		environmentally friendly, biocide- and pesticide-free wood preservative
	1K ECO-FINISH EF 55X	1C	PARQUETLINE		resistant parquet lacquer for public and private areas
	DECO-OIL-COLOR DO 630	1C	DECOLINE		coloured oil in 11 basic shades, all shades can be mixed with each other
	DECO-OIL DO 640C	1C	DECOLINE		water and dirt repellent properties
	DECO-OIL DO 660	1C+2C	DECOLINE		very easy processing

WAXES AND OILS

GLOSS LEVEL	HARDENER	DIN 4102-B1 low flammability or similar	EN 71, part 3 free of extractable heavy metals	DIN 53160 resistance to saliva and perspiration	DIN 68861-1B chemical resistance	Others	Page
JM7475-2 (deep matt) JM7475-3 (matt) JM7475-4 (semi-matt)		yes	yes	under examination			11, 49, 59
JM7477-2 (deep matt) JM7477-3 (matt) JM7477-4 (semi-matt)		under examination	yes	under examination			12, 50, 60
matt (-5) semi-matt (-3)	10:1 by volume with AQUAHARDENER AH 410		yes		1B		13, 42, 51, 61
natural matt	10:1 by volume with AQUAHARDENER AH 410		yes	yes	1B		13, 51, 62
			yes				12, 50, 60
natural matt							61
high gloss	2:1 by volume with BRILLIANT-HARDENER JH2870-0	yes	yes	yes	1B		23, 35
natural matt	100:15 by volume with hardener H 132		yes		1B		22, 34
matt (CE 894-5) deep matt (CE 894-6)	10:1 by volume with hardener H 132		yes	yes	1B		21, 34
glossy (H 371) semi-matt (H 373) matt (H 375) deep matt (H 376) super matt (H 376-S2) special matt (H 377)	10:1 by volume with hardener H 132	yes	yes	yes	1B		22, 33
semi-matt (H 2243) matt (H 2245) deep matt (H 2246)	2:1 by volume with hardener H 2242		yes	yes	1B		21, 33
natural matt	2:1 by volume with hardener H 1862		yes	yes	1B		23
matt		yes	yes				68
matt			yes				68
semi-matt (EF 553) matt (EF 555)			yes			DIBt-approval GISCODE: W2+	41
matt					1C	complies GISCODE: Ö60, cobalt-free	24, 43, 52, 62
matt			yes		1C	complies GISCODE: Ö60, cobalt-free	24, 35, 43, 52, 63
matt	10:1 by volume with DECO-OILHARDENER DH 613		yes	yes	1C	complies GISCODE: Ö10, Ö-Norm C 2380:2021, cobalt-free	25, 36, 44, 53, 63

	SCOPE OF APPLICATION	PRODUCT	1C/2C	PRODUCT LINE	TYPE OF APPLICATION	BENEFITS
WACHSE UND ÖLE		DECO-OBJECT-OIL DO 670	1C	DECOLINE		excellent water resistance
		DECO-NATURWACHS-OIL DO 680	1C	DECOLINE		good penetration behaviour
		ECO-HARTWACHS-FINISH EHF 570	1C	PARQUETLINE		extremely good penetration behaviour and easy processing
BEIZEN		HYDROSTAIN MODULAR JC73X0-XXXX	1C	STAINLINE		modular stain system for a wide range of applications
		CLASSICSTAIN CS 731-833	1C	STAINLINE		mixable basic shades for a wide range of design possibilities
PFLEGE UND REINIGUNG		JORA-CLEAN BASIC CLEANER JCG 920		CARELINE		highly effective cleaning agent for heavily soiled surfaces
		JORA-CARE MAINTENANCE AGENT JCW 930		CARELINE		natural cleaning and care product
		JORA-CARE WAX POLISH JCW 940		CARELINE		easy to handle polish with protective effect
		JORA-CARE MAINTENANCE OIL JCP 950		CARELINE		fast drying care for oiled surfaces
		JORA-CARE MAINTENANCE OIL JCP 955		CARELINE		natural, water-based maintenance oil, VOC-free
		JORA-CLEAN PLASTIC CLEANER JCK 960		CLASSICLINE		effective cleaner for plastic surfaces

LEGEND OF PICTOGRAMS

TYPE OF APPLICATION

	Spray gun		Vacuum coating
	Dipping		Brushing
	Spatula		Wiping
	Roller		Single disc machine
	Curtain coating		
	Roller coating		

GLOSS LEVEL	HARDENER	DIN 4102-B1 low flammability or similar	EN 71, part 3 free of extractable heavy metals	DIN 53160 resistance to saliva and perspiration	DIN 68861-1B chemical resistance	Others	Page
matt			yes	yes	1C	complies GISCODE: Ö 60, cobalt-free	25, 36, 44, 53, 64
semi-matt to matt			yes	yes	1C	complies GISCODE: Ö 60, cobalt-free	26, 37, 45, 54, 64
matt			yes		1C	complies GISCODE: Ö 60, cobalt-free	26, 41
							27, 45, 55, 65
							27, 37
							72
							72
							73
							73
							74
							74



SCOPE OF APPLICATION



Indoors/Outdoors



Baths



Interior Fittings



Doors



Stairs



Metal



Furniture



Glass



Parquet



Cleaning



Kitchen



Care



PLANTAG Coatings GmbH

Plantagenweg 34–38

32758 Detmold

GERMANY

Fon +49 5231 6002 661

Fax +49 5231 6002 9661

E-Mail info@jordanlacke.de

JORDAN Lacke – a brand of PLANTAG Coatings GmbH

